


KWC PROTRONIC-S Electronic pillar tap with battery operation

Modell-Linie: PROTRONIC-S | AQUA131
Taps | Electronic taps

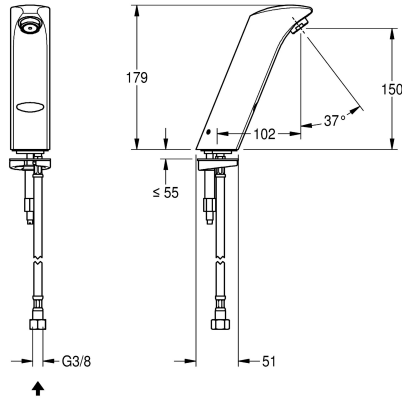

KWC-No.

2000067774

PROTRONIC-S battery-supplied washbasin tap with touch-free operation, DN 15 with aerator and integrated flow control, for

connection to pre-mixed warm or cold water supply, polished chromium-plated brass, 6 V battery.

Technical Data

with backflow preventer

calculation flow rate cold wat

default automatic hygiene flus

default flow time

depressurised

with filter

functional principle

hygiene flushing

diameter nominal

inlet size

Locking mechanism

material fitting

minimum flow pressure

type of mixing

number of batteries

Parameterization

Pop-up waste set

power supply connection

position of power connection

Type of power supply

protective system IP

with rosettes/cover plate

protective shutdown

sound insulation

Spout

spout projection

surface finish fitting

no

0.1 l/s

not activated

60 Seconds

no

yes

electronic self-closing

yes

DN 15

G 3/8

Top section, non-ceramic

brass

1 bar

no

1

remote control

no

Battery 6 V

from bottom

Battery

IP65

no

yes

no

fixed

102 mm

chromed



KWC PROTRONIC-S Electronic pillar tap with battery operation

Modell-Linie: **PROTRONIC-S | AQUA131**
Taps | Electronic taps

surface treatment fitting	polished
temperature limit	no
thermal disinfection	no
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.1 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



PURETHERM under-table thermostat

2030012758
PURE0031



Remote control

2000101087
ZAQUA091



Aerator

2000101160
ZAQUA087