


KWC Electronic siphon control

Modell-Linie: **FLUSHING-TAPS-ELEC | AQUA420**
Flushing systems | Electronic urinal flushing systems

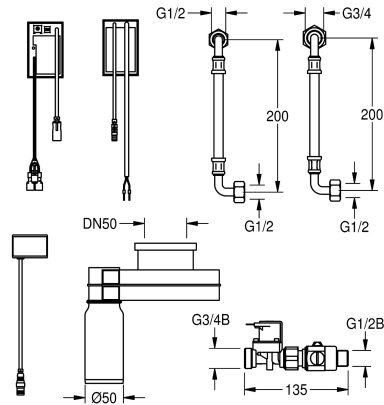

KWC-No.

2000071169

Electronic siphon control unit for invisible installation. For touch free flushing of KWC stainless steel urinals. With flexible pressure hose, solenoid valve, electronic module and siphon with outside mounted

sensor without water contact, hygiene flushing 24 h after the last activity, 230 V AC.

Technical Data

calculation flow rate cold wat

0.3 l/s

default automatic hygiene flus

24h after the last activity

Flushing volume adjustable

no

functional principle

electronic self-closing

diameter nominal

DN 15

inlet size

G 1/2 B

material fitting

synthetic

maximum flow pressure

5 bar

maximum flushing flow

0.7 l/s

maximum flush water volume

10.5 Liter

minimum flow pressure

1 bar

minimum flushing flow

0.3 l/s

minimum flush water volume

1.2 Liter

Parameterization

manual thermal disinfection

power supply connection

230 V AC

power consumption

0.5 Voltampere

Type of power supply

Transformer

protective system IP

IP65 / 40

sound insulation

no

with transformer/power supply

yes

type of flushing fitting

urinal flush valve

type of mounting

wall mounting

type of operation

sensor operation

type of sensor


radar-electronic sensor

water connection

threaded connection (external)

Basic colour

Other




KWC

Electronic siphon control

Modell-Linie: FLUSHING-TAPS-ELEC | AQUA420

Flushing systems | Electronic urinal flushing systems

Optional Accessories



Extension cable 5 m

2030043814

ACEX9010

Spare Parts



Connection hose DN10 x 200

2030004881

EFLSY0025