


KWC
Electronic siphon control

Modell-Linie: FLUSHING-TAPS-ELEC | AQUA420
Flushing systems | Electronic urinal flushing systems

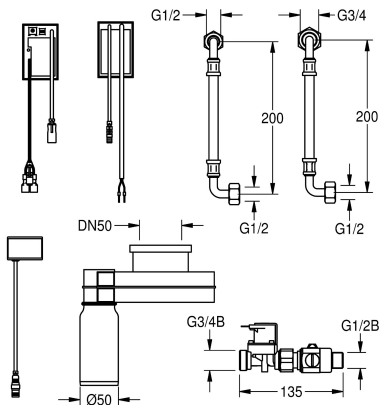

KWC-No.

2000071169


Electronic siphon control unit for invisible installation. For touch free flushing of KWC stainless steel urinals. With flexible pressure hose, solenoid valve, electronic module and siphon with outside mounted

sensor without water contact, hygiene flushing 24 h after the last activity, 230 V AC.

Technical Data

calculation flow rate cold wat
default automatic hygiene flus
Flushing volume adjustable
functional principle
diameter nominal
inlet size
material fitting
maximum flow pressure
maximum flushing flow
maximum flush water volume
minimum flow pressure
minimum flushing flow
minimum flush water volume
Parameterization
power supply connection
power consumption
Type of power supply
protective system IP
sound insulation
with transformer/power supply
type of flushing fitting
type of mounting
type of operation
type of sensor
water connection
Basic colour

0.3 l/s
24h after the last activity
no
electronic self-closing
DN 15
G 1/2 B
synthetic
5 bar
0.7 l/s
10.5 Liter
1 bar
0.3 l/s
1.2 Liter
manual thermal disinfection
230 V AC
0.5 Voltampere
Transformer
IP65 / 40
no
yes
urinal flush valve
wall mounting
sensor operation
radar-electronic sensor
threaded connection (external)
Other




KWC

Electronic siphon control

Modell-Linie: **FLUSHING-TAPS-ELEC | AQUA420**
Flushing systems | Electronic urinal flushing systems

Optional Accessories



Extension cable 5 m

2030043814
ACEX9010

Spare Parts



Connection hose DN10 x 200

2030004881
EFLSY0025
