
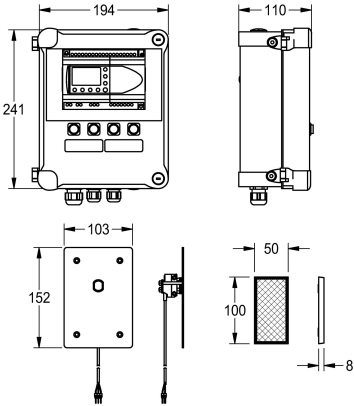


KWC  
Light barrier control

Modell-Linie: **LIGHT-BARRIER | AQRE440**  
Flushing systems | Electronic urinal flushing systems

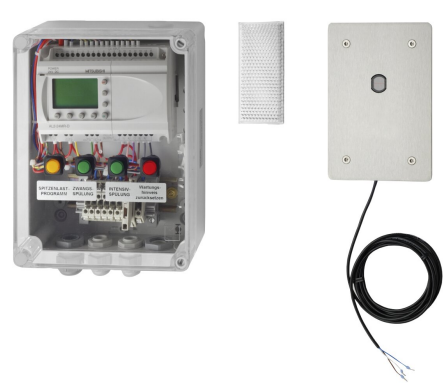

**KWC-No.**  
**2000101045**

Light beam control for automatic non-touch flushing of urinal slab facilities with a maximum niche width of 9.5 metres, consisting of

control, sensor and reflector, 24 VDC.

Technical Data

default automatic hygiene flush
Flushing volume adjustable
functional principle
material casing
overall depth
overall height
overall width
Parameterization
power supply connection
position of power connection
power consumption
Type of power supply
protective system IP
with transformer/power supply
type of flushing fitting
type of mounting
type of operation
type of sensor
Basic colour

not activated
no
electronic self-closing
synthetic
107 mm
220 mm
168 mm
manual thermal disinfection
24 V DC
from bottom
9 Voltampere
Transformer
IP 67 / 52
no
urinal flush valve
wall mounting
sensor operation
opto-electronic sensor
Other

Mandatory Accessories



**KWC**  
Light barrier control

**Modell-Linie: LIGHT-BARRIER | AQRE440**  
Flushing systems | Electronic urinal flushing systems



**Power supply unit**  
**2030068573**  
ASEX1031