


KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1004
Taps | Self closing taps

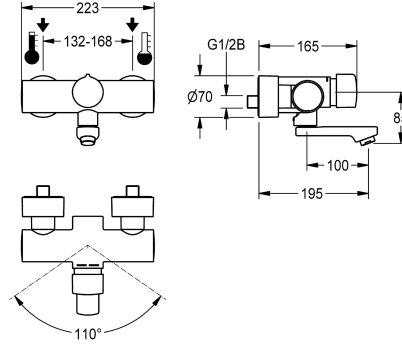

KWC-No.
2030032992 Projection 195 mm
2030032991 Projection 135 mm
2030040314 with projection 135 mm and aerator with flow regulator 3.0 l/min
2030040316 with projection 195 mm and aerator with flow regulator 3.0 l/min
2030040317 with projection 255 mm and aerator with flow regulator 3.0 l/min

spout projection
195 mm
135 mm
135 mm
195 mm
255 mm

volume flow rate at 3 bar
0.1 l/s
0.1 l/s
0.05 l/s
0.05 l/s
0.05 l/s

F5S-Mix self-closing wall-mounted mixer DN 15 as single-mixer tap for wall mounting with lockable swivelling spout, for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With

adjustable, turn-proof temperature stop. Connects to hot and cold water. All-metal construction, high-polished chromium-plated brass. Laminar jet controller with integrated flow regulator 6.0 l/min. With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 195 mm.

Technical Data

with backflow preventer	yes
calculation flow rate cold wat	0.07 l/s
calculation flow rate hot wate	0.07 l/s
compatible A3000 open	no
depressurised	no
with filter	yes
adjustable flow time	yes
functional principle	hydraulic self-closing
hygiene flushing	no
diameter nominal	DN 15
inlet size	G 1/2 B
Locking mechanism	Top section, ceramic
material fitting	brass
maximum flow time	35 Seconds
minimum flow pressure	0.5 bar
minimum flow time	5 Seconds
type of mixing	yes
Pop-up waste set	no



KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1004
Taps | Self closing taps

with rosettes/cover plate	yes
protective shutdown	no
sound insulation	no
Spout	rotating, bottom
spout projection	195 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	no
type of mounting	wall mounting
type of operation	manual operation
type of tap	bib tap
volume flow rate at 3 bar	0.1 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

Spare Parts



Plug chromed

2030053006
ASSX9004



Handle push cap

2030050753
ASSM9004



Temperature stop

2030046189
ASSM9002



Safety ring

2030048357
ASSX9003



FRAMIC self-closing mixing cartridge

2030046185
ASSM9001