


KWC F5E-Mix
Electronic pillar mixer for separate power supply

Modell-Linie: F5E | F5EM1004
Taps | Electronic taps

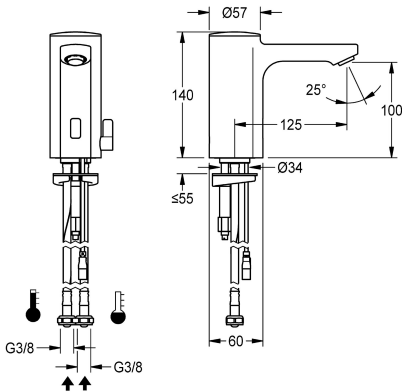

KWC-No.

2030036159

2030039434

with flow regulator 3.0 l/min

volume flow rate at 3 bar

0.08 l/s

0.05 l/s


F5E-Mix pillar mixer DN 15 for sanitary facilities, opto-electronically controlled. For connection to hot and cold water via hoses with integrated backflow preventer and strainers. Control electronics, solenoid valve cartridge and sensor in all-metal housing, high-polished chromium-plated brass. Temperature lever with adjustable, turn-proof temperature stop as well as conversion set for concealed mixing device. Anti-theft aerator, design SLIM, with

integrated flow regulator 5.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control. Separate power supply via power supply unit 6.75 V / 12 V DC or AQUA 3000 open system accessories.

Technical Data

with backflow preventer
calculation flow rate cold wat
calculation flow rate hot wate
compatible A3000 open
default automatic hygiene flus
depressurised
with filter
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material fitting
minimum flow pressure
type of mixing
Parameterization
Pop-up waste set
power supply connection
position of power connection
power consumption
Type of power supply
protective system IP

yes
0.07 l/s
0.07 l/s
yes
24h after the last activity
no
yes
electronic self-closing
yes
DN 15
G 3/8
Top section, non-ceramic
brass-look
1 bar
yes
remote control
no
6,75 / 12 V DC / A3000 open
from bottom
1.5 Voltampere
Transformer
IP59K






KWC F5E-Mix
Electronic pillar mixer for separate power supply

Modell-Linie: F5E | F5EM1004
Taps | Electronic taps

with rosettes/cover plate	no
protective shutdown	yes
sound insulation	no
Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	no
with transformer/power supply	no
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.08 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Mandatory Accessories

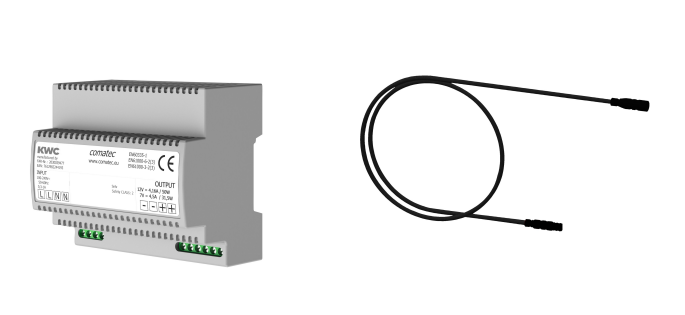

Power supply unit	Extension cable 5 m
2030039477 ACEX9001	2030043814 ACEX9010

Optional Accessories






KWC F5E-Mix
Electronic pillar mixer for separate power supply

Modell-Linie: F5E | F5EM1004
Taps | Electronic taps

**Bidirectional remote control for
electronical fittings F3 and F5**

2030036654
ACEX9005



**2-button remote control for fittings F3
and F5**

2030036849
ACEX9004



Socket

2030040334
ACEX1001



Anti-twist protection for F5S

2030035383
ACXX1001




**Electronic module for wash basin taps
F5**

2030041520
ACEX1002



**Electronic module EM5 with ID 02010,
with flush box**

2030059118
ACEX1004



PURETHERM under-table thermostat

2030012758
PURE0031



5.0 l/min aerator, angle-adjustable

2030041326
ACXX1002



3.0 l/min. aerator

2030041424
ASXX1008




Aerator 1.8 l/min

2030041442
ACXX1005



Spare Parts



Aerator 5.0 l/min

2030041011


Cap

2030041558




Plug red

2030041951



Plug blue


2030041952



KWC F5E-Mix
Electronic pillar mixer for separate power supply

Modell-Linie: F5E | F5EM1004
Taps | Electronic taps

ASXX1004



Solenoid valve cartridge

2030045522
ACXX9002

ASEX1007



Temperature selection lever

2030041431
ASEM1001


ASEX1009



Hose

2030041320
ASXM1001

ASEX1010



Quick-action fastener


2030043596
ASEX1013

Water way

2030041949
ASEX1008

Sensor, ID 01/00004

2030041458
ASEX1005



Mounting key

2030041329
ACXX1003

