


## KWC F5E-Mix

Electronic pillar mixer with plug-in power supply unit

Modell-Linie: F5E | F5EM1008

Taps | Electronic taps

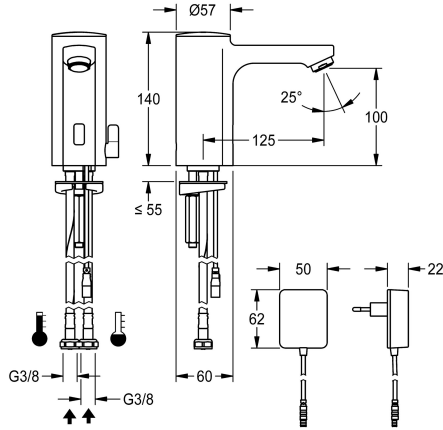

**KWC-No.**

**2030035328**

**2030039431**

with flow regulator 3.0 l/min

**volume flow rate at 3 bar**

0.08 l/s

0.05 l/s

F5E-Mix pillar mixer DN 15 for sanitary facilities, opto-electronically controlled. For connection to hot and cold water via hoses with integrated backflow preventer and strainers. Control electronics, solenoid valve cartridge and sensor in all-metal housing, high-polished chromium-plated brass. Temperature lever with adjustable, turn-proof temperature stop as well as conversion set

for concealed mixing device. Aerator with integrated flow regulator 3.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control. With 100 - 240 V AC plug-in power supply unit.

**Technical Data**

with backflow preventer

calculation flow rate cold wat

calculation flow rate hot wate

compatible A3000 open

default automatic hygiene flus

depressurised

with filter

functional principle

hygiene flushing

diameter nominal

inlet size

Locking mechanism

material fitting

minimum flow pressure

type of mixing

Parameterization

Pop-up waste set

power supply connection

position of power connection

power consumption

Type of power supply

protective system IP

with rosettes/cover plate

yes

0.07 l/s

0.07 l/s

no

24h after the last activity

no

yes

electronic self-closing

yes

DN 15

G 3/8

Top section, non-ceramic

brass

1 bar

yes

remote control

no

100 - 240 V AC

from bottom

1.5 Voltampere

Transformer

IP59K

no



## KWC F5E-Mix

Electronic pillar mixer with plug-in power supply unit

Modell-Linie: F5E | F5EM1008

Taps | Electronic taps

protective shutdown	yes
sound insulation	no
Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	no
with transformer/power supply	yes
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.05 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

### Optional Accessories



**Bidirectional remote control for electronic fittings F3 and F5**

**2030036654**  
ACEX9005




**2-button remote control for fittings F3 and F5**

**2030036849**  
ACEX9004



**Socket**

**2030040334**  
ACEX1001

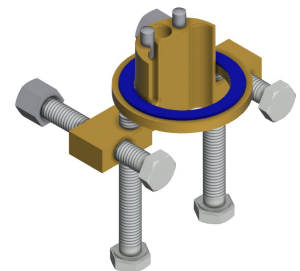

**Anti-twist protection for F5S**

**2030035383**  
ACXX1001




**Extension cable 5 m**

**2030043814**  
ACEX9010



**PURETHERM under-table thermostat**

**2030012758**  
PURE0031



**Aerator 1.8 l/min**

**2030041442**  
ACXX1005



**Theft-proof housing for aerator**

**2000104778**  
ZTAPS0005

## KWC F5E-Mix

Electronic pillar mixer with plug-in power supply unit

Modell-Linie: F5E | F5EM1008

Taps | Electronic taps

### Spare Parts




3.0 l/min. aerator

**2030041424**  
ASXX1008




Cap

**2030041558**  
ASEX1007




Plug red

**2030041951**  
ASEX1009



Plug blue

**2030041952**  
ASEX1010



Solenoid valve cartridge

**2030045522**  
ACXX9002




Temperature selection lever

**2030041431**  
ASEM1001



Hose

**2030041320**  
ASXM1001




Quick-action fastener

**2030043596**  
ASEX1013



Water way

**2030041949**  
ASEX1008



Sensor, ID 01/00004

**2030041458**  
ASEX1005