


## KWC F5E

Electronic pillar tap with plug-in power supply unit

Modell-Linie: F5E | F5EV1006  
Taps | Electronic taps

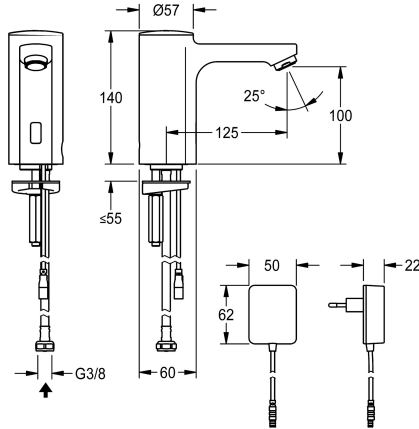

**KWC-No.**

2030035330

2030039436

with flow regulator 3.0 l/min

**volume flow rate at 3 bar**

0.08 l/s

0.05 l/s

F5E pillar tap DN 15 for sanitary facilities, opto-electronically controlled. For connection to pre-mixed hot or cold water via hose and strainer. Control electronics, solenoid valve cartridge and sensor in all-metal housing, high-polished chromium-plated brass. Aerator with integrated flow regulator 3.0 l/min. Activated water hygiene

flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control. With 100 - 240 V AC plug-in power supply unit.

**Technical Data**

with backflow preventer

no

calculation flow rate cold wat

0.1 l/s

compatible A3000 open

no

default automatic hygiene flus

24h after the last activity

depressurised

no

with filter

yes

functional principle

electronic self-closing

hygiene flushing

yes

diameter nominal

DN 15

inlet size

G 3/8

Locking mechanism

Top section, non-ceramic

material fitting

brass

minimum flow pressure

1 bar

type of mixing

no

Parameterization

remote control

Pop-up waste set

no

power supply connection

100 - 240 V AC

position of power connection

from bottom

power consumption

1.5 Voltampere

Type of power supply

Transformer

protective system IP

IP59K

with rosettes/cover plate

no

protective shutdown

yes

sound insulation

no



## KWC F5E

Electronic pillar tap with plug-in power supply unit

**Modell-Linie: F5E | F5EV1006**

Taps | Electronic taps

Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	no
thermal disinfection	no
with transformer/power supply	yes
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.05 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

### Optional Accessories



**Bidirectional remote control for electronic fittings F3 and F5**

**2030036654**  
ACEX9005




**2-button remote control for fittings F3 and F5**

**2030036849**  
ACEX9004




**Socket**

**2030040334**  
ACEX1001



**Anti-twist protection for F5S**

**2030035383**  
ACXX1001




**Extension cable 5 m**

**2030043814**  
ACEX9010



**PURETHERM under-table thermostat**

**2030012758**  
PURE0031



**Aerator 5.0 l/min**

**2030041011**  
ASXX1004



**5.0 l/min aerator, angle-adjustable**


**2030041326**  
ACXX1002

## KWC F5E

Electronic pillar tap with plug-in power supply unit

Modell-Linie: F5E | F5EV1006

Taps | Electronic taps



**Aerator 1.8 l/min**

**2030041442**  
ACXX1005



**Theft-proof housing for aerator**

**2000104778**  
ZTAPS0005

### Spare Parts




**3.0 l/min. aerator**

**2030041424**  
ASXX1008




**Cap**

**2030041558**  
ASEX1007




**Plug red**

**2030041951**  
ASEX1009



**Plug blue**

**2030041952**  
ASEX1010



**Solenoid valve cartridge**

**2030003033**  
EAQFU0001



**Hose**

**2030041311**  
ASXX1005



**Quick-action fastener**

**2030043596**  
ASEX1013



**Water way**

**2030041949**  
ASEX1008




## **KWC F5E**

Electronic pillar tap with plug-in power supply unit

**Modell-Linie: F5E | F5EV1006**

Taps | Electronic taps



**Sensor, ID 01/00004**

---

**2030041458**

ASEX1005

---