


## KWC F5E

Electronic pillar tap for separate power supply

Modell-Linie: F5E | F5EV1008

Taps | Electronic taps

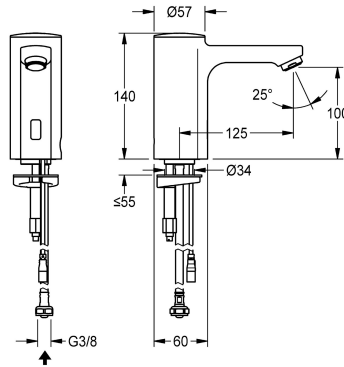

### KWC-No.

2030036158

2030039438

with flow regulator 3.0 l/min

### volume flow rate at 3 bar

0.08 l/s

0.05 l/s

F5E pillar tap DN 15 for sanitary facilities, opto-electronically controlled. For connection to pre-mixed hot or cold water via hose and strainer. Control electronics, solenoid valve cartridge and sensor in all-metal housing, high-polished chromium-plated brass. Aerator with integrated flow regulator 3.0 l/min. Activated water hygiene

flushing 24 hours after last activation, safety switch-off with continuous reflection and saving of statistical data. With option for parameterization and communication via optional, bidirectional remote control. Separate power supply via power supply unit 6.75 V / 12 V DC or AQUA 3000 open system accessories.

### Technical Data

with backflow preventer

no

calculation flow rate cold wat

0.1 l/s

compatible A3000 open

yes

default automatic hygiene flus

24h after the last activity

depressurised

no

with filter

yes

functional principle

electronic self-closing

hygiene flushing

yes

diameter nominal

DN 15

inlet size

G 3/8

Locking mechanism

Top section, non-ceramic

material fitting

brass-look

minimum flow pressure

1 bar

type of mixing

no

Parameterization

remote control

Pop-up waste set

no

power supply connection

6,75 / 12 VDC / A3000 open

position of power connection

from bottom

power consumption

1.5 Voltampere

Type of power supply

Transformer

protective system IP

IP59K

with rosettes/cover plate


no

protective shutdown

yes

sound insulation

no



## KWC F5E


Electronic pillar tap for separate power supply

Modell-Linie: F5E | F5EV1008

Taps | Electronic taps


Spout	fixed
spout projection	125 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	no
thermal disinfection	no
with transformer/power supply	no
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.05 l/s
water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

### Mandatory Accessories



Power supply unit

**2030039477**  
ACEX9001

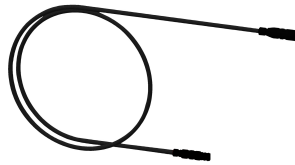

Extension cable 5 m

**2030043814**  
ACEX9010

### Optional Accessories



Bidirectional remote control for electronic fittings F3 and F5

**2030036654**




2-button remote control for fittings F3 and F5

**2030036849**



Socket

**2030040334**  
ACEX1001

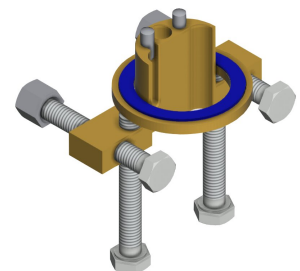

Anti-twist protection for F5S

**2030035383**  
ACXX1001


## KWC F5E

Electronic pillar tap for separate power supply

Modell-Linie: F5E | F5EV1008

Taps | Electronic taps

ACEX9005

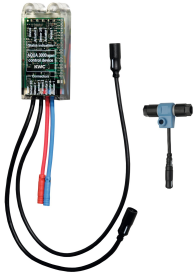

Electronic module for wash basin taps F5

2030041520  
ACEX1002

ACEX9004




PURETHERM under-table thermostat

2030012758  
PURE0031




5.0 l/min aerator, angle-adjustable

2030041326  
ACXX1002



Aerator 1.8 l/min

2030041442  
ACXX1005



Aerator 5.0 l/min

2030041011  
ASXX1004



Theft-proof housing for aerator

2000104778  
ZTAPS0005

### Spare Parts




3.0 l/min. aerator

2030041424  
ASXX1008




Cap

2030041558  
ASEX1007



Plug red

2030041951  
ASEX1009



Plug blue


2030041952  
ASEX1010

## KWC F5E

Electronic pillar tap for separate power supply

Modell-Linie: F5E | F5EV1008

Taps | Electronic taps



Solenoid valve cartridge

**2030045522**  
ACXX9002



Hose

**2030041311**  
ASXX1005




Quick-action fastener

**2030043596**  
ASEX1013



Water way

**2030041949**  
ASEX1008



Sensor, ID 01/00004

**2030041458**  
ASEX1005