



KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1008

Taps | Self closing taps







F5S mix self-closing wall-mounted mixer DN 15 as single-mixer tap for wall mounting with lockable swivelling spout, for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With

spout projection	volume flow rate at 3 bar	
195 mm	0.1 l/s	
135 mm	0.1 l/s	
255 mm	0.1 l/s	
135 mm	0.05 l/s	
195 mm	0.05 l/s	
255 mm	0.05 l/s	

adjustable, tum-proof temperature stop. Connects to hot and cold water. All-metal construction, high-polished chromium-plated brass. Aerator with an integrated flow regulator 3.0 *l/*min. With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 135 mm.

Technical Data

with backflow preventer	
calculation flow rate cold wat	
calculation flow rate hot wate	
compatible A3000 open	
depressurised	
with filter	
adjustable flow time	
functional principle	
hygiene flushing	
diameter nominal	
inlet size	
Locking mechanism	
material fitting	
maximum flow time	
minimum flow pressure	
minimum flow time	
type of mixing	

yes	
0.07 l/s	
0.07 l/s	
no	
no	
yes	
yes	
hydraulic self-closing	
no	
DN 15	
G 1/2 B	
Top section, ceramic	
brass-look	
35 Seconds	
0.5 bar	
5 Seconds	
yes	





KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1008 Taps | Self closing taps

with rosettes/cover plateyesprotective shutdownnosound insulationnoSpoutrotating, bottomspout projection135 mmsurface finish fittingchromedsurface treatment fittingpolishedtemperature limityesthermal disinfectionnotype of nountingwall mountingtype of tapbib tapvolume flow rate at 3 bar0.05 l/sAccent colournone	-up waste set	no		
sound insulationnoSpoutrotating, bottomspout projection135 mmsurface finish fittingchromedsurface treatment fittingpolishedtemperature limityesthermal disinfectionnotype of mountingwall mountingtype of operationbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	rosettes/cover plate	yes		
Spoutrotating, bottomspout projection135 mmsurface finish fittingchromedsurface treatment fittingpolishedtemperature limityesthermal disinfectionnotype of mountingwall mountingtype of operationmanual operationtype of tapbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	ective shutdown	no		
spout projection135 mmsurface finish fittingchromedsurface treatment fittingpolishedtemperature limityesthermal disinfectionnotype of mountingwall mountingtype of operationmanual operationtype of tapbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	nd insulation	no		
surface finish fittingchromedsurface treatment fittingpolishedtemperature limityesthermal disinfectionnotype of mountingwall mountingtype of operationmanual operationtype of tapbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	ut	rotating, bottom		
surface treatment fittingpolishedtemperature limityesthermal disinfectionnotype of mountingwall mountingtype of operationmanual operationtype of tapbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	ut projection	135 mm		
temperature limityesthermal disinfectionnotype of mountingwall mountingtype of operationmanual operationtype of tapbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	ace finish fitting	chromed		
thermal disinfectionnotype of mountingwall mountingtype of operationmanual operationtype of tapbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	ace treatment fitting	polished		
type of mountingwall mountingtype of operationmanual operationtype of tapbib tapvolume flow rate at 3 bar0.05 l/swater connectionS-connections	perature limit	yes		
type of operation manual operation type of tap bib tap volume flow rate at 3 bar 0.05 l/s water connection S-connections	nal disinfection	no		
type of tap bib tap volume flow rate at 3 bar 0.05 l/s water connection S-connections	of mounting	wall mounting		
volume flow rate at 3 bar 0.05 l/s water connection S-connections	of operation	manual operation		
water connection S-connections	oftap	bib tap		
	me flow rate at 3 bar	0.05 l/s		
Accent colour none	er connection	S-connections		
	ent colour	none		
Basic colour chrome-look (glossy)	ic colour	chrome-look (glossy)		


Optional Accessories



Theft-proof housing for aerator

2000104778 ZTAPS0005

Spare Parts

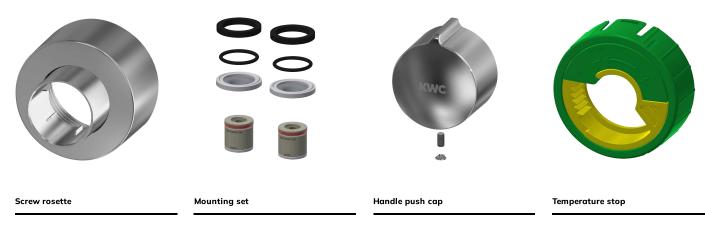



KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1008 Taps | Self closing taps

2030046777	2030003401	2030050753	2030046189
ASXX9003	EAQLT0009	ASSM9004	ASSM9002
Safety ring	FRAMIC self-closing mixing cartridge 2030046185 ASSM9001	3.0 l/min. aerator	Swivel spout, 40 mm
2030048357		2030041424	2030049950
ASSX9003		ASXX1008	ASXX1009



Plug chromed

2030053006 ASSX9004