


## KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1009  
Taps | Self closing taps

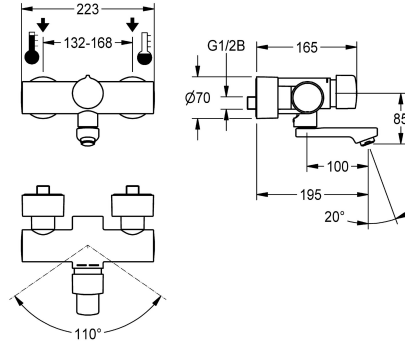

### KWC-No.

**2030032992**  
Projection 195 mm

**2030032991**  
Projection 135 mm

**2030040314**  
with projection 135 mm and aerator with flow regulator 3.0 l/min

**2030040316**  
with projection 195 mm and aerator with flow regulator 3.0 l/min

**2030040317**  
with projection 255 mm and aerator with flow regulator 3.0 l/min

### spout projection

195 mm

135 mm

135 mm

195 mm

255 mm

### volume flow rate at 3 bar

0.1 l/s

0.1 l/s

0.05 l/s

0.05 l/s

0.05 l/s

F5S mix self-closing wall-mounted mixer DN 15 as single-mixer tap for wall mounting with lockable swivelling spout, for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With

adjustable, turn-proof temperature stop. Connects to hot and cold water. All-metal construction, high-polished chromium-plated brass. Aerator with an integrated flow regulator 3.0 l/min. With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 195 mm.

### Technical Data

with backflow preventer

yes

calculation flow rate cold wat

0.07 l/s

calculation flow rate hot wate

0.07 l/s

compatible A3000 open

no

depressurised

no

with filter

yes

adjustable flow time

yes

functional principle

hydraulic self-closing

hygiene flushing

no

diameter nominal

DN 15

inlet size

G 1/2 B

Locking mechanism

Top section, ceramic

material fitting

brass

maximum flow time

35 Seconds

minimum flow pressure

0.5 bar

minimum flow time

5 Seconds

type of mixing

yes

Pop-up waste set

no



## KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1009  
Taps | Self closing taps

with rosettes/cover plate	yes
protective shutdown	no
sound insulation	no
Spout	rotating, bottom
spout projection	195 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	no
type of mounting	wall mounting
type of operation	manual operation
type of tap	bib tap
volume flow rate at 3 bar	0.05 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

### Spare Parts



**Handle push cap**

**2030050753**  
ASSM9004



**Temperature stop**

**2030046189**  
ASSM9002



**Safety ring**

**2030048357**  
ASSX9003



**FRAMIC self-closing mixing cartridge**

**2030046185**  
ASSM9001



**3.0 l/min. aerator**

**2030041424**  
ASXX1008



**Plug chromed**

**2030053006**  
ASSX9004