


кwс

F3S Self-closing straight-way valve DN 20

Modell-Linie: F3S | F3SV2009 Showers | Self closing showers





KWC-No.

2030053188

F3S Self-closing straight-way valve DN 20 for in-wall mounting, for shower facilities. Self-closing functional part, hydraulically controlled, piston-free design, automatic closing, adjustable flow duration. For connection to pre-mixed hot water or cold water.

Housing including replaceable valve seat, with interior thread G 3/4, visible parts made of high-polished chrome-plated brass. With rosette, depth adjustability 15 mm.

Technical Dat

Technical Data		
additional connections	no	
with backflow preventer	no	
Built-in fitting model	Built-in section	
calculation flow rate cold wat	0.3 l/s	
circulation	no	
compatible A3000 open	no	
connection with pay water disp	not possible	
with filter	no	
adjustable flow time	yes	
functional principle	hydraulic self-closing	
for hand shower	no	
hygiene flushing	no	
diameter nominal	DN 20	
inlet size	G 3/4	
Locking mechanism	Top section, non-ceramic	
material fitting	brass-look	
maximum flow time	30 Seconds	
minimum flow pressure	1 bar	
minimum flow time	5 Seconds	
type of mixing	no	
with rosettes/cover plate	yes	
protective shutdown	no	
shower pipe draining	no	
sound insulation	no	
surface finish fitting	chromed	
temperature limit	no	




кwс

F3S Self-closing straight-way valve DN 20

Modell-Linie: F3S | F3SV2009 Showers | Self closing showers

thermal disinfection	no
type of mounting	in-wall installation without b
type of operation	manual operation
type of shower	in-wall fitting
volume flow rate at 3 bar	1.25 l/s
water connection	threaded connection (internal)
position of water connection	from bottom
Accent colour	none
Basic colour	chrome-look (glossy)

Spare Parts

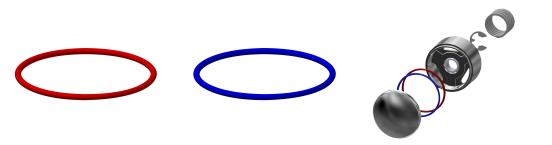



O-Ring, red	O-Ring, blue
2030042961	2030042962
ASSV2002	ASSV2003

Push cap

2030042960 ASSV2001

Push-on rosette

2000104892 EAQLN0008

-