


KWC F5LME Hybrid kitchen fitting

Modell-Linie: F5L | F5LME001
Taps | Manual taps

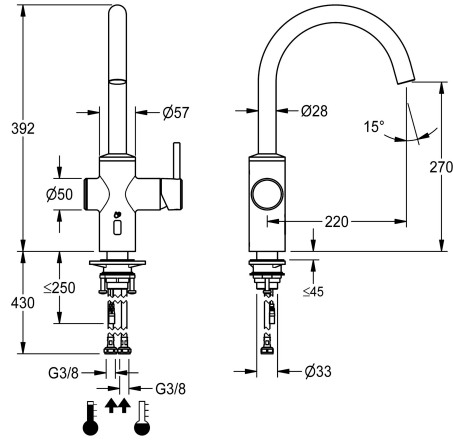

KWC-No.

2030061048

F5LME hybrid kitchen fitting DN 15 as pillar mixer with swivelling spout, can be locked in the centre position. Adjustable swivel ranges of 50°, 120° and 360°. For connection to hot water and cold water via hoses with strainers. Single lever mixer with mixer cartridge with ceramic disc technology and adjustable, turn-proof temperature stop. Alternative activation using hand reflection via an opto-electronic sensor for time-controlled water release with preset mixing water temperature. Mixer cartridge, solenoid valve and sensor with control electronics in all-metal housing, brushed stainless steel. Laminar jet controller with integrated flow rate controller (8.0 l/min). Projection 220 mm. Activated water hygiene


flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With option for parametrisation and communication via optional, bidirectional remote control. Optionally for battery operation with battery compartment including 6 V lithium battery (CR-P2) per fitting for installation under the kitchen sink or for separate power supply via 6.75 V/12 V DC power supply unit or AQUA 3000 open system accessories.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

Technical Data

| |
|---------------------------|
| depressurised |
| with filter |
| functional principle |
| hygiene flushing |
| diameter nominal |
| Locking mechanism |
| material fitting |
| minimum flow pressure |
| type of mixing |
| Pop-up waste set |
| with rosettes/cover plate |
| Spout |
| spout projection |
| surface finish fitting |
| temperature limit |
| thermal disinfection |
| type of mounting |
| type of operation |
| type of tap |
| volume flow rate at 3 bar |
| water connection |
| Accent colour |


| |
|--------------------------|
| no |
| yes |
| manual |
| prepared |
| DN 15 |
| Top section, non-ceramic |
| stainless steel |
| 1 bar |
| yes |
| no |
| no |
| rotating, top |
| 220 mm |
| brushed |
| yes |
| yes |
| tap hole |
| manual operation |
| pillar tap |
| 0.13 l/s |
| hose (gland nut) |
| none |



KWC F5LME Hybrid kitchen fitting


Modell-Linie: F5L | F5LME001
Taps | Manual taps

Mandatory Accessories



Power supply unit

2030039477
ACEX9001



Extension cable 5 m

2030043814
ACEX9010



In-wall power supply

2030039825
ACEX9003

Optional Accessories



Bidirectional remote control for
electronic fittings F3 and F5

2030036654
ACEX9005



2-button remote control for fittings F3
and F5


2030036849
ACEX9004



PURETHERM under-table thermostat

2030012758
PURE0031

Spare Parts



Solenoid valve cartridge

2030045522



KWC F5LME
Hybrid kitchen fitting

Modell-Linie: F5L | F5LME001
Taps | Manual taps

ACXX9002
