


## KWC F5E

Washbasin fitting for concealed mounting

Modell-Linie: F5E | F5EV1013

Taps | Electronic taps

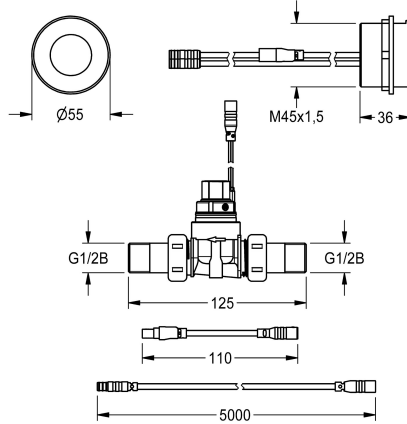

### KWC-No.

**2030062315**

F5E Washbasin fitting DN 15 for concealed mounting. Opto-electronic control, activation on hand reflection. For connection to pre-mixed hot water or cold water. With round sensor (diameter 55 mm), with integrated control electronics and deactivation of cleaning, high-polished chrome-plated brass, to be screwed in from rear, with anti-twist protection, solenoid valve with screw fixings G 1/2 B, extension cable for solenoid valve, length 5 m. Activated water hygiene flushing 24 hours after last activation and saving of

statistical data. With option for parameterization and communication via optional, bidirectional remote control. Optional battery operation with 6 V lithium battery (CR-P2) per fitting or separate power supply via power supply unit 6.75 V/12 V DC or AQUA 3000 open system accessories.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

### Technical Data

with backflow preventer

compatible A3000 open

default automatic hygiene flush

depressurised

with filter

functional principle

hygiene flushing

diameter nominal

inlet size

Locking mechanism

material casing

material fitting

minimum flow pressure

type of mixing

Parameterization

Pop-up waste set

power supply connection

Type of power supply

with rosettes/cover plate

protective shutdown

sound insulation

surface finish fitting

surface treatment fitting

no

yes

24h after the last activity

no

no

electronic self-closing

yes

DN 15

G 1/2 B

Top section, non-ceramic

brass-look

synthetic

1 bar

no

remote control

no

6,75 / 12 V DC / A3000 open

Transformer


no

yes

no

chromed

polished



## KWC F5E

Washbasin fitting for concealed mounting

Modell-Linie: F5E | F5EV1013

Taps | Electronic taps


temperature limit	no
thermal disinfection	no
with transformer/power supply	no
type of mounting	concealed
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	in-wall tap
water connection	threaded connection (external)
Accent colour	none

### Mandatory Accessories




Battery compartment

**3600002063**  
ACEX9023



Power supply unit

**2030039477**  
ACEX9001



Extension cable 5 m

**2030043814**  
ACEX9010

### Optional Accessories




Bidirectional remote control for electronic fittings F3 and F5

**2030036654**  
ACEX9005



2-button remote control for fittings F3 and F5

**2030036849**  
ACEX9004

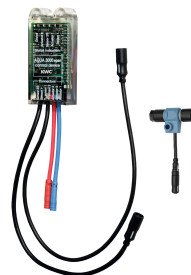

Electronic module EM5 for F5 washbasin fitting

**2030065092**  
ACEV1002



Cover plate

**2000101054**  
ZAQUA084