


KWC F5E  
Washbasin fitting for concealed mounting

Modell-Linie: F5E | F5EV1013  
Taps | Electronic taps

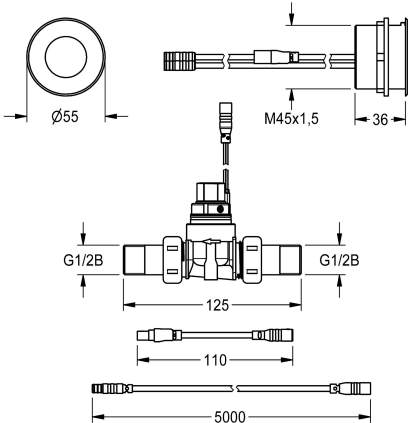

KWC-No.

2030062315

F5E Washbasin fitting DN 15 for concealed mounting. Opto-electronic control, activation on hand reflection. For connection to pre-mixed hot water or cold water. With round sensor (diameter 55 mm), with integrated control electronics and deactivation of cleaning, high-polished chrome-plated brass, to be screwed in from rear, with anti-twist protection, solenoid valve with screw fixings G 1/2 B, extension cable for solenoid valve, length 5 m. Activated water hygiene flushing 24 hours after last activation and saving of


statistical data. With option for parameterization and communication via optional, bidirectional remote control. Optional battery operation with 6 V lithium battery (CR-P2) per fitting or separate power supply via power supply unit 6.75 V/12 V DC or AQUA 3000 open system accessories.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

Technical Data

with backflow preventer
compatible A3000 open
default automatic hygiene flus
depressurised
with filter
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material casing
material fitting
minimum flow pressure
type of mixing
Parameterization
Pop-up waste set
power supply connection
Type of power supply
with rosettes/cover plate
protective shutdown
sound insulation
surface finish fitting
surface treatment fitting

no
yes
24h after the last activity
no
no
electronic self-closing
yes
DN 15
G 1/2 B
Top section, non-ceramic
brass-look
synthetic
1 bar
no
remote control
no
6,75 / 12 V DC / A3000 open
Transformer
no
yes
no
chromed
polished




KWC F5E  
Washbasin fitting for concealed mounting

Modell-Linie: F5E | F5EV1013  
Taps | Electronic taps


temperature limit	no
thermal disinfection	no
with transformer/power supply	no
type of mounting	concealed
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	in-wall tap
water connection	threaded connection (external)
Accent colour	none

Mandatory Accessories

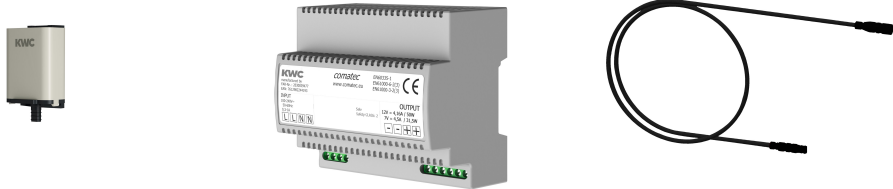

<b>Battery compartment</b>	<b>Power supply unit</b>	<b>Extension cable 5 m</b>
3600002063 ACEX9023	2030039477 ACEX9001	2030043814 ACEX9010

Optional Accessories

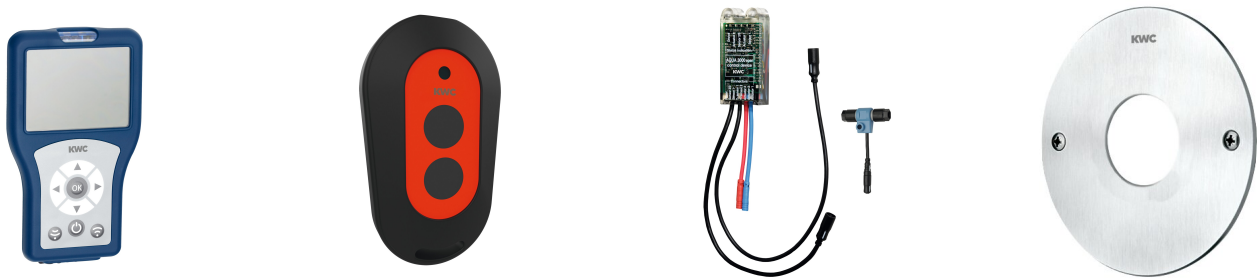

<b>Bidirectional remote control for electronical fittings F3 and F5</b>	<b>2-button remote control for fittings F3 and F5</b>	<b>Electronic module EM5 for F5 washbasin fitting</b>	<b>Cover plate</b>
2030036654 ACEX9005	2030036849 ACEX9004	2030065092 ACEV1002	2000101054 ZAQUA084