


KWC F5L-Therm

Thermostatic single-lever pillar mixer with pop-up waste

Modell-Linie: F5L | F5LT1003

Taps | Manual taps





KWC-No.


2030066482

F5L-Therm thermostatic single-lever mixer as DN 15 pillar mixer for sanitary facilities. Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc technology. For connection to hot water and cold water via hoses,

includes strainers. All-metal construction, high-polished chrome-plated brass. Anti-theft aerator, SLIM design, with integrated flow rate controller 5.0 l/min, projection 125 mm. With pop-up waste set drain fitting G 1 1/4 mm, chrome-plated.

Technical Data

with backflow preventer	
depressurised	
with filter	
functional principle	
hygiene flushing	
diameter nominal	
inlet size	
Locking mechanism	
material fitting	
minimum flow pressure	
type of mixing	
Pop-up waste set	
with rosettes/cover plate	
protective shutdown	
sound insulation	
Spout	
spout projection	
surface finish fitting	
surface treatment fitting	
temperature limit	
thermal disinfection	
type of mounting	
type of operation	
type of tap	
volume flow rate at 3 bar	

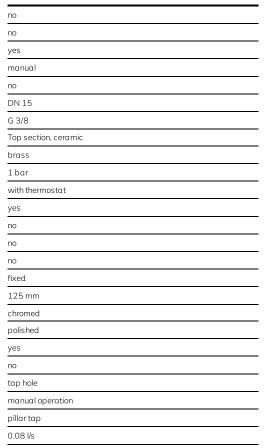





KWC F5L-Therm

Thermostatic single-lever pillar mixer with pop-up waste

Modell-Linie: F5L | F5LT1003 Taps | Manual taps

water connection	hose (gland nut)
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories





Anti-twist protection

2030041324 ACLM1009

5.0 I/min aerator, angle-adjustable

2030041326 ACXX1002

Spare Parts









Quick-action fastener

2030010045 EAQFT0005

Hose

2030041311 ASXX1005

Aerator 5.0 I/min

2030041011 ASXX1004

Mounting key

2030041329 ACXX1003



Pop-up waste set



KWC F5L-Therm

Thermostatic single-lever pillar mixer with pop-up waste

Modell-Linie: F5L | F5LT1003 Taps | Manual taps

2030045528 ASLM1004