



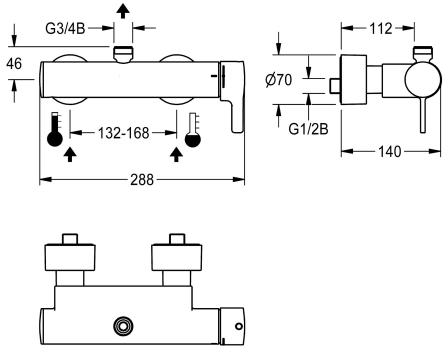

KWC F5L-Therm
Thermostatic single-lever wall-mounted mixer

Modell-Linie: F5L | F5LT2001
Showers | Manual shower

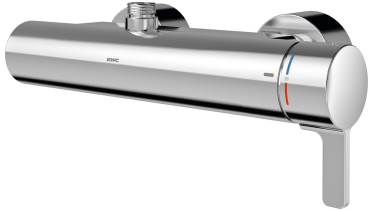

KWC-No.

2030066495

F5L-Therm thermostatic single-lever mixer as DN 15 wall-mounted mixer for wall mounting, for shower facilities. Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc technology. With mechanism for optional hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid-operated flush valve

cartridge necessary) and storage of statistical data. For connection to hot and cold water. Scald-protection Safe-Touch housing with outlet on top, G 3/4 B, for installation of waste elbow or wall-mounted shower pipe. All-metal construction, high-polished chrome-plated brass. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes.

Technical Data

| | |
|--------------------------------|----------------------|
| additional connections | no |
| with backflow preventer | yes |
| circulation | no |
| connection with pay water disp | not possible |
| with filter | yes |
| functional principle | manual |
| for hand shower | no |
| hygiene flushing | prepared |
| diameter nominal | DN 15 |
| inlet size | G 1/2 B |
| Locking mechanism | Top section, ceramic |
| material casing | brass |
| material fitting | brass |
| minimum flow pressure | 1 bar |
| type of mixing | with thermostat |
| with rosettes/cover plate | yes |
| protective shutdown | no |
| shower pipe draining | no |
| sound insulation | no |
| surface finish casing | chromed |
| surface finish fitting | chromed |
| surface treatment fitting | polished |
| temperature limit | yes |
| thermal disinfection | yes |










KWC F5L-Therm
Thermostatic single-lever wall-mounted mixer

Modell-Linie: F5L | F5LT2001
Showers | Manual shower

| | |
|------------------------------|----------------------|
| type of mounting | wall mounting |
| type of operation | manual operation |
| type of shower | wall fitting |
| volume flow rate at 3 bar | 0.25 l/s |
| water connection | S-connections |
| position of water connection | from backside |
| Accent colour | none |
| Basic colour | chrome-look (glossy) |

Optional Accessories

| | | | |
|---|---|---|--|
|  |  |  |  |
| AQUAJET-Comfort shower head | AQUAJET-Slimline shower head | Bent outlet | Bent outlet |
| 2030021283 SHAC0008 | 2000103757 AQUA757 | 2030050434 ACXX2005 | 2030050435 ACXX2006 |
|  |  |  | |
| Shower pipe | Hygiene unit for F5L single-lever wall mixers | Solenoid valve cartridge | |
| 2030041525 ACXX2003 | 2030039446 ACLM9001 | 2030045522 ACXX9002 | |