


KWC F5L-Therm thermostatic single-lever in-wall mixer

Modell-Linie: F5L | F5LT2005
Showers | Manual shower

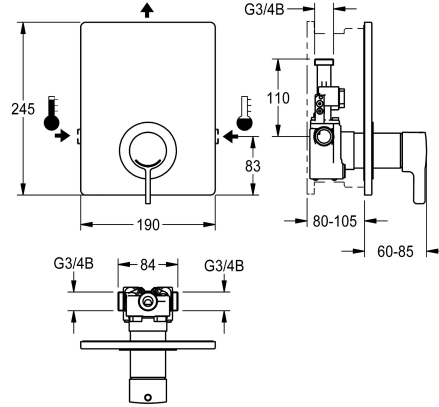

KWC-No.

2030066500

F5L-Therm thermostatic single-lever mixer DN 15 as finished installation kit for in-wall installation in basic installation kit, for shower facilities. For connection to hot and cold water. Function block with integrated thermostatic cartridge and mechanism for an optional hygiene unit for automatic hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid valve cartridge necessary) and storage of statistical data.

Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc technology. All-metal construction, visible parts high-polished, chrome-plated. Holding frame including profile seal, stainless-steel cover plate 190 x 245 mm with covered screw fixing, chrome-plated plastic rosette, backflow preventer and strainers. Depth adjustability 25 mm.

Technical Data

additional connections	no
with backflow preventer	yes
Built-in fitting model	Finishing section
circulation	no
connection with pay water disp	not possible
Cover plate height	245 mm
Cover plate width	190 mm
with filter	yes
functional principle	manual
for hand shower	no
hygiene flushing	prepared
diameter nominal	DN 15
inlet size	G 3/4 B
Locking mechanism	Top section, ceramic
material casing	stainless steel
material fitting	brass-look
minimum flow pressure	1 bar
type of mixing	with thermostat
with rosettes/cover plate	yes
protective shutdown	no
shower pipe draining	no
sound insulation	no
surface finish casing	satin finished
surface finish fitting	chromed




KWC

F5L-Therm thermostatic single-lever in-wall mixer

Modell-Linie: F5L | F5LT2005
Showers | Manual shower

surface treatment fitting	polished
temperature limit	yes
thermal disinfection	yes
with transformer/power supply	no
type of mounting	in-wall installation with box
type of operation	manual operation
type of shower	in-wall fitting
volume flow rate at 3 bar	0.23 l/s
water connection	threaded connection (external)
position of water connection	from side
Accent colour	chrome-look (glossy)
Basic colour	stainless steel-look


Mandatory Accessories



R5 System box for in-wall mixer


2030028990
F5BX2001

Optional Accessories



Extension set for F5L DN 15 single lever mixer

2030044779
ACLM2002

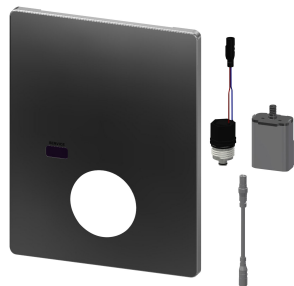

Hygiene unit for F5L single-lever in-wall mixer

2030041526
ACLM2001


Spare Parts

KWC

F5L-Therm thermostatic single-lever in-wall mixer


Modell-Linie: F5L | F5LT2005

Showers | Manual shower




Rosette

2030048765
ASET2006



Cover plate stainless steel

2030045475
ASXM2001



Holding frame

2030045472
ASXX9004



Stainless steel care set

2000109019
ZWSPL0024




Cleaning product CHROMOL

2000105091
ZWSPL0023



Backflow preventer DN 6

2030045816
ASXX9002



Spare part set

2030045818
ASLM2005