


## KWC F5E Electronic in-wall tap

Modell-Linie: F5E | F5EV2005  
Showers | Electronic self closing shower

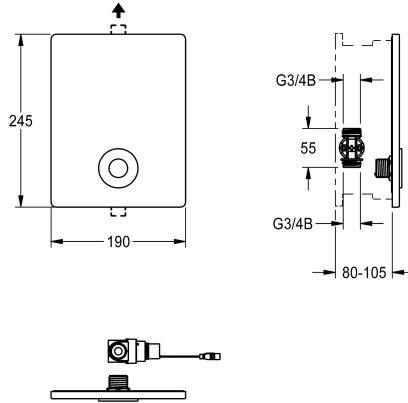

### KWC-No.

**2030067748**


F5E gate valve DN 15 as finished installation kit for in-wall installation in basic installation kit, for shower facilities. Electronically controlled, for connection to pre-mixed hot water or cold water. With solenoid valve, holding frame with profile seal, stainless steel cover plate 190 x 245 mm with covered screw fixing including sensor with control electronics, start/stop function and cleaning deactivation. Depth adjustable by 25 mm. Activated hygiene flushing 24 hours after last activation and saving of statistical data.

With option for parametrisation and communication via optional bidirectional remote control. Option for battery operation with 6 V lithium battery (CR-P2) per fitting or separate power supply via power supply unit 6.75 V/12 V DC or AQUA 3000 open system accessories.

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

### Technical Data

additional connections	no
with backflow preventer	no
Built-in fitting model	Finishing section
calculation flow rate cold wat	0.15 l/s
circulation	no
compatible A3000 open	yes
connection with pay water disp	via electronic module
Cover plate height	245 mm
Cover plate width	190 mm
default automatic hygiene flus	24h after the last activity
default flow time	30 Seconds
with filter	yes
adjustable flow time	yes
functional principle	electronic self-closing
for hand shower	no
hygiene flushing	yes
diameter nominal	DN 15
inlet size	G 3/4 B
Locking mechanism	Top section, non-ceramic
material casing	stainless steel
maximum flow time	255 Seconds
minimum flow pressure	1 bar
minimum flow time	1 Seconds



## KWC F5E



### Electronic in-wall tap

Modell-Linie: F5E | F5EV2005

Showers | Electronic self closing shower

type of mixing	no
Parameterization	remote control
power supply connection	6,75 / 12 VDC / A3000 open
position of power connection	from top
power consumption	1,5 Voltampere
with rosettes/cover plate	yes
protective shutdown	yes
shower pipe draining	no
sound insulation	no
surface finish casing	satin finished
surface treatment fitting	none
temperature limit	no
thermal disinfection	automatic thermal disinfection
with transformer/power supply	no
type of mounting	in-wall installation with box
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of shower	in-wall fitting
volume flow rate at 3 bar	0,23 l/s
water connection	threaded connection (external)
position of water connection	from bottom
Accent colour	none
Basic colour	stainless steel

### Mandatory Accessories



#### Power supply unit

**2030039477**  
ACEX9001

#### Extension cable 5 m

**2030043814**  
ACEX9010

### Optional Accessories

## KWC F5E

Electronic in-wall tap

Modell-Linie: F5E | F5EV2005

Showers | Electronic self closing shower



**Bidirectional remote control for electronic fittings F3 and F5**


**2030036654**  
ACEX9005



**2-button remote control for fittings F3 and F5**

**2030036849**  
ACEX9004

## Spare Parts



**Solenoid valve cartridge**

**2030003033**  
EAQFU0001



**Stainless steel care set**

**2000109019**  
ZWSP0024



**Cleaning product CHROMOL**

**2000105091**  
ZWSP0023