


## KWC F5E - A3000 open Electronic shower fitting for rear panel mounting

Modell-Linie: F5E | F5EV2006  
Showers | Electronic self closing shower

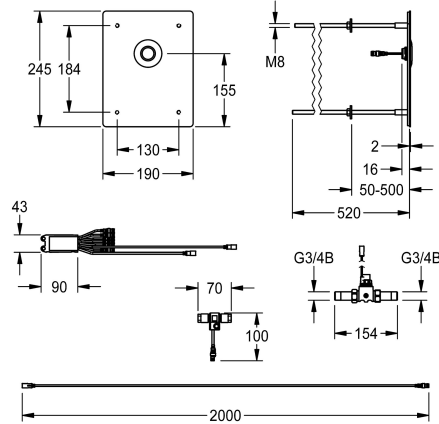

### KWC-No.

**2030068173**

F5E - A3000 open straight-way valve DN 15 for shower facilities, for concealed mounting. Especially suitable for facilities at risk of vandalism. Electronically controlled, for connection to pre-mixed hot water or cold water. With waterproof electronic module and electric T-junction for connection to system cable, solenoid valve, 190 x 245 x 2 mm stainless steel cover plate for invisible mounting via

threaded rods, up to a wall thickness of 50 to 500 mm, including piezo push-button with start/stop function and 2 m extension cable. Connection and maintenance via service room. Activated hygiene flushing 24 hours after the last activity. With facility for parameterization, cleaning deactivation and communication via ECC2 function controller, 24 V DC.

NEW

### Technical Data

additional connections	no
with backflow preventer	no
Built-in fitting model	Built-in section
circulation	no
compatible A3000 open	yes
connection with pay water disp	single / multiple pay water di
Cover plate height	245 mm
Cover plate width	190 mm
default automatic hygiene flus	24h after the last activity
default flow time	30 Seconds
with filter	yes
adjustable flow time	yes
functional principle	electronic self-closing
hygiene flushing	yes
diameter nominal	DN 15
inlet size	G 3/4 B
Locking mechanism	Top section, non-ceramic
material casing	stainless steel
material code casing	1.4301 Chrome Nickel steel V2A
maximum flow time	255 Seconds
minimum flow pressure	1 bar
minimum flow time	1 Seconds
type of mixing	no
Parameterization	network
power supply connection	A3000 open 24 V DC



## KWC F5E - A3000 open Electronic shower fitting for rear panel mounting

**Modell-Linie: F5E | F5EV2006**  
Showers | Electronic self closing shower

Type of power supply	Transformer
protective system IP	IP59K
with rosettes/cover plate	yes
protective shutdown	yes
shower pipe draining	no
Shower head	without shower head
sound insulation	no
surface finish casing	satin finished
temperature limit	no
with transformer/power supply	no
type of mounting	bolt mounting
type of operation	sensor operation
type of sensor	piezo-electronic sensor
type of shower	in-wall fitting
volume flow rate at 3 bar	0.47 l/s
water connection	pipe
with soap dish	no
Basic colour	stainless steel-look

### Mandatory Accessories



**ECC2 function controller**

**2000108123**  
ZA30P0011



**ECC2 function controller**

**2030016282**  
ZA30P0022



**System cable**

**2000100801**  
ZAQUA077



**System cable**

**2000100852**  
ZAQUA078



**System cable**

**2000104274**  
ZAQUA012




**System cable**

**2000104272**  
ZAQUA011

## KWC F5E - A3000 open Electronic shower fitting for rear panel mounting


Modell-Linie: F5E | F5EV2006  
Showers | Electronic self closing shower

### Spare Parts



Solenoid valve

**2000101328**  
ZAQUA032



Piezo Switch

**2000104441**  
EAT300001



Electrical T junction

**2000100853**  
ZAQUA075



Stainless steel care set

**2000109019**  
ZWSPL0024



Cleaning product CHROMOL

**2000105091**  
ZWSPL0023