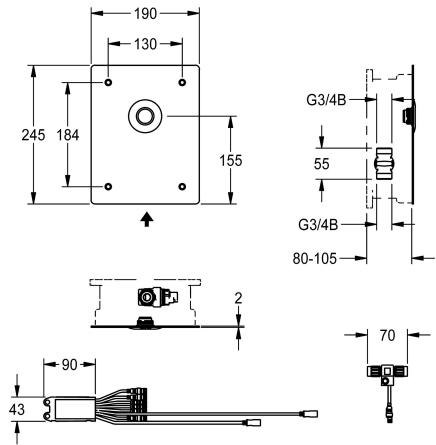


KWC F5E - A3000 open
Electronic shower fitting for in-wall installation

Modell-Linie: F5E | F5EV2007
Showers | Electronic self closing shower



KWC-No.

2030068174

F5E - A3000 open straight-way valve DN 15 as finished installation kit for in-wall installation in basic installation kit, for shower facilities. Especially suitable for facilities at risk of vandalism. Electronically controlled, for connection to pre-mixed hot water or cold water. With waterproof electronic module and electric T-junction for connection to system cable, solenoid valve, stainless

steel cover plate 190 x 245 x 2 mm, mounting from the front with safety screws, including piezo push-button with start/stop function. Depth adjustability 25 mm. Activated hygiene flushing 24 hours after the last activity. With facility for parameterization, cleaning deactivation and communication via ECC2 function controller, 24 V DC.

Technical Data

with backflow preventer
Built-in fitting model
compatible A3000 open
Cover plate height
Cover plate width
default automatic hygiene flus
default flow time
adjustable flow time
functional principle
hygiene flushing
Locking mechanism
minimum flow pressure
type of mixing
Parameterization
power supply connection
Type of power supply
protective system IP
with rosettes/cover plate
protective shutdown
shower pipe draining
sound insulation
surface finish fitting
with transformer/power supply
type of mounting
type of operation

yes
Finishing section
yes
245 mm
190 mm
24h after the last activity
30 Seconds
yes
electronic self-closing
yes
Top section, non-ceramic
1 bar
no
network
A3000 open 24 V DC
Transformer
IP59K
yes
yes
no
no
chromed
no
in-wall installation with box
sensor operation













KWC F5E - A3000 open
Electronic shower fitting for in-wall installation

Modell-Linie: F5E | F5EV2007
Showers | Electronic self closing shower

type of sensor	piezo-electronic sensor
type of shower	in-wall fitting
volume flow rate at 3 bar	0.46 l/s

Mandatory Accessories

			
ECC2 function controller	ECC2 function controller	System cable	System cable
2000108123 ZA3OP0011	2030016282 ZA3OP0022	2000100801 ZAQUA077	2000100852 ZAQUA078
			
System cable	System cable		
2000104274 ZAQUA012	2000104272 ZAQUA011		
Solenoid valve	Piezo Switch	Electrical T junction	Stainless steel care set
			



KWC F5E - A3000 open
Electronic shower fitting for in-wall installation

Modell-Linie: F5E | F5EV2007
Showers | Electronic self closing shower

2000101328
ZAQUA032

2000104441
EAT3O0001

2000100853
ZAQUA075

2000109019
ZWSPLO024



Cleaning product CHROMOL

2000105091
ZWSPLO023
