



### Modell-Linie: F5E | F5EV2008

Showers | Electronic self closing shower





### KWC-No.

#### 2030070434

F5E - A3000 open shower panel made of stainless steel for wall mounting with straight-way valve and connecting nozzles for shower head. Electronically controlled, for connection from the rear to pre-mixed hot or cold water. Connecting nozzles for the required additional DN 15 KWC shower head with pre-fitted flow regulator 3.0 l/min. Housing made of stainless steel, single-piece enclosed, including safety screws. With solenoid valve, piezo push-button with start/stop function, waterproof electronic module, electric Tjunction for connection to system cable, connecting hose with

lockable water flow regulator and strainer. Activated hygiene flushing 24 hours after the last activity. With facility for parameterization, cleaning deactivation and communication via ECC2 function controller, 24 V DC.

Dimensions of housing 232 x 1160 x 90 mm (W x H x D)

Shower head must be ordered separately.

# NEW

#### **Technical Data**

additional connections	
with backflow preventer	
circulation	
compatible A3000 open	
connection with pay water disp	
default automatic hygiene flus	
default flow time	
with filter	
adjustable flow time	
functional principle	
for hand shower	
hygiene flushing	
diameter nominal	
inlet size	
Locking mechanism	
material casing	
material code casing	
material fitting	
maximum flow time	
minimum flow pressure	
minimum flow time	
type of mixing	
overall depth	

no	
yes	
no	
yes	
via electronic mo	dule
24h after the las	t activity
30 Seconds	
yes	
yes	
electronic self-cl	osing
no	
yes	
DN 15	
G 1/2 A	
Top section, non-	ceramic
stainless steel	
1.4301 Chrome I	Nickel steel V2A
brass-look	
6,500 Seconds	
1 bar	
1 Seconds	
no	
90 mm	



### Modell-Linie: F5E | F5EV2008

Showers | Electronic self closing shower

overall height	1,160 mm
overall width	232 mm
Parameterization	network
power supply connection	A3000 open 24 V DC
position of power connection	from backside
Type of power supply	Transformer
protective system IP	IP59K
with rosettes/cover plate	yes
protective shutdown	yes
shower pipe draining	no
Shower head	for separately shower head
with shower set	no
sound insulation	no
surface finish casing	satin finished
surface treatment fitting	none
temperature limit	no
with transformer/power supply	no
type of mounting	wall mounting
type of operation	sensor operation
type of sensor	piezo-electronic sensor
type of shower	shower panel
volume flow rate at 3 bar	0.15 l/s
water connection	hose (gland nut)
position of water connection	from backside
with soap dish	no
Accent colour	chrome-look (glossy)
Basic colour	stainless steel-look

### **Mandatory Accessories**



AQUAJET-Slimline shower head for KWC shower panels and systems

2030054255 SHAS0011



AQUAJET-Comfort shower head for KWC shower panels and systems

**2030054254** SHAC0011



MÜNCHEN shower head for KWC shower panels and systems

2030054793 SHMU0011




ECC2 function controller

**2000108123** ZA3OP0011



Modell-Linie: F5E | F5EV2008 Showers | Electronic self closing shower

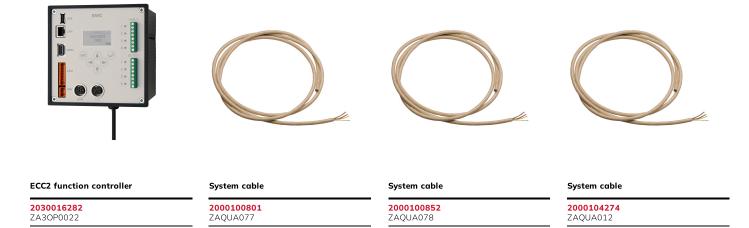



System cable

**2000104272** ZAQUA011

### **Optional Accessories**



Flow controller 6.0 l/min

**2030027586** ESHHE0004



Flow controller 12.0 l/min

2000104783 ESHHE0002

### **Spare Parts**



Modell-Linie: F5E | F5EV2008 Showers | Electronic self closing shower





Solenoid valve

**2000101328** ZAQUA032



Electrical T junction

**2000100853** ZAQUA075

Flow controller 9,0 l/min

2000104782 ESHHE0001



Stainless steel care set

**2000109019** ZWSPL0024



Water quantity regulator

**2030055270** ASXX2004

**2000104441** EAT300001

Piezo Switch

Cleaning product CHROMOL

2000105091 ZWSPL0023