


## KWC F4ET-Med Thermostatic wall-mounted mixer

Modell-Linie: F4 | F4ET1001  
Taps | Electronic taps

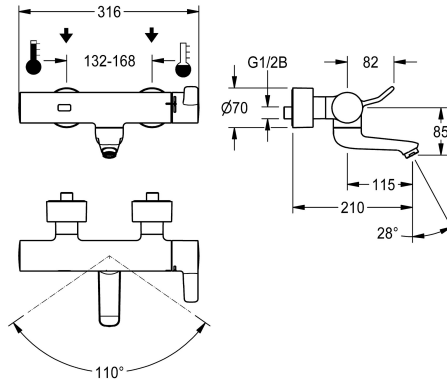

### KWC-No.

**2030072424**


F4ET-Med thermostatic wall-mounted mixer as DN 15 wall-mounted mixer, for wall mounting with lockable swivelling spout, for sanitary facilities in the healthcare and nursing sector. Opto-electronically controlled, triggered by hand movement with subsequent automatic switching to body detection. Thermostat with metal handle, including lever for reduced-touch operation, and adjustable, turn-proof temperature stop. With the option of manual thermal disinfection. For connecting to hot and cold water. Control electronics, stagnation-free hygiene solenoid valve cartridge, flow rate controller 9.0 l/min, 6 V lithium battery (CR-P2) and sensor in the scald-protected safe-touch housing, polished chromium-plated

brass. Decoupled from the tap housing, volume-reduced, smooth water flow from low-lead brass (lead proportion  $\leq 0.2\%$ ), and without nickel coating. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Self-emptying spout with laminar jet controller. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 210 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With option for parameterisation and communication via optional, bidirectional remote control.

### Technical Data

with backflow preventer
compatible A3000 open
default automatic hygiene flus
depressurised
with filter
adjustable flow time
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material fitting
maximum flow time
minimum flow pressure
minimum flow time
type of mixing
number of batteries
overall depth
overall width
Parameterization
Pop-up waste set
power supply connection

yes
no
24h after the last activity
no
yes
yes
electronic self-closing
yes
DN 15
G 1/2 B
Top section, non-ceramic
brass-look
255 Seconds
1 bar
1 Seconds
with thermostat
1
210 mm
316 mm
remote control
no
Battery 6 V



## KWC F4ET-Med Thermostatic wall-mounted mixer

**Modell-Linie: F4 | F4ET1001**  
Taps | Electronic taps

Type of power supply	Battery
protective system IP	IP59K
with rosettes/cover plate	yes
protective shutdown	yes
Spout	rotating, bottom
spout projection	115 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	manual
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	wall mounting
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	bib tap
volume flow rate at 3 bar	0.15 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

### Optional Accessories




**Bidirectional remote control for electronic fittings F3 and F5**

**2030036654**  
ACEX9005



**2-button remote control for fittings F3 and F5**

**2030036849**  
ACEX9004



**Aerator**

**2030071309**  
ASXX1042

### Spare Parts

## KWC F4ET-Med Thermostatic wall-mounted mixer

Modell-Linie: F4 | F4ET1001  
Taps | Electronic taps



**Battery compartment**

**3600002063**  
ACEX9023




**Lithium battery 6 V**

**2000104846**  
EPRTR0008




**F5 Foil**

**2030053034**  
ASET2010



**Temperature stop**

**2030003296**  
EAQLT0003



**Cover**

**2030003258**  
EAQLT0002