


## KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1113  
Kranar | Manuella kranar

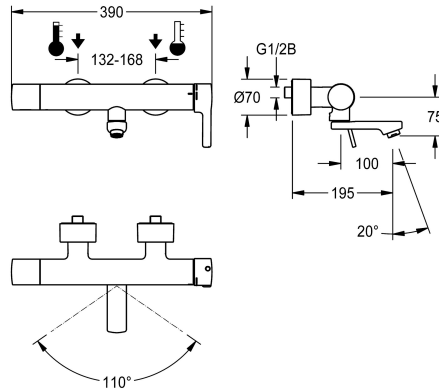

### KWC-No.

**3600003807**

Projection 195 mm

**3600003809**

Projection 135 mm

**3600003852**

Projection 255 mm

### Sprut kastare

100 mm

40 mm

160 mm

NEW

F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting with lockable swivelling spout, for sanitary facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled

from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 195 mm projection. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

### Technical Data

Nedtryckt

Justerbar flödestid

Funktionell princip

Nominell diameter

Inbyggnadsmått

Låsmekanism

Material delar

Typ av blandning

ATT-WS-POPUPWASTESET

Typ av strömförsörjning

Säkerhetsavstängning

Ljud isolering

ATT-WS-SPOUT

Sprut kastare

Ytfinish hölje

yt finish

Passande ytfinish

Temperaturstopp

ATT-WS-TRANSFORMER

Nej

Nej

Manual

DN 15

G 1/2 B

Överdel av keramik

Mässing

Med termostat

Nej

BATTERY

Nej

Nej

ROTATING-BOT

100 mm


Förkromad

Förkromad

polerad

Ja

Nej





## KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

**Modell-Linie: F5L | F5LT1113**

Kranar | Manuella kranar

Typ av montering

Väggmontering

Typ av operation

Manuell operation

Typ av kran

Tvågreppsblandare

Vattenanslutning

S-anslutningar

Accentfärg

utan

Basfärg

Kromat utseende (glansigt)