


KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1112
Taps | Manual taps

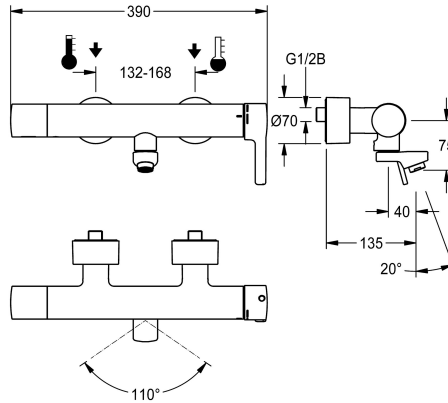

KWC-No.

360003807

Projection 195 mm

360003809

Projection 135 mm

360003852

Projection 255 mm

spout projection

100 mm

40 mm

160 mm

NEW


F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting with lockable swivelling spout, for sanitary facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled

from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Reach 135 mm. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

Technical Data

depressurised
adjustable flow time
functional principle
diameter nominal
inlet size
Locking mechanism
material fitting
type of mixing
Pop-up waste set
protective shutdown
sound insulation
Spout
spout projection
surface finish casing
surface finish fitting
surface treatment fitting
temperature limit
with transformer/power supply
type of mounting

no
no
manual
DN 15
G 1/2 B
Top section, ceramic
brass
with thermostat
no
no
no
rotating, bottom
40 mm
chromed
chromed
polished
yes
no
wall mounting





KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1112

Taps | Manual taps

type of operation

manual operation

type of tap

bib tap

water connection

S-connections

Accent colour

none

Basic colour

chrome-look (glossy)