


## KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1112  
Kranar | Manuella kranar

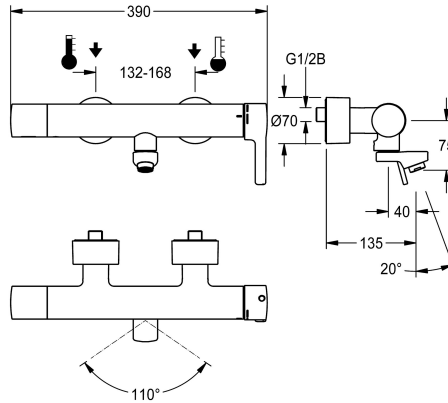

### KWC-No.

**360003807**

Projection 195 mm

**360003809**

Projection 135 mm

**360003852**

Projection 255 mm

### Sprut kastare

100 mm

40 mm

160 mm

NEW


F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting with lockable swivelling spout, for sanitary facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled

from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Reach 135 mm. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

### Technical Data

Nedtryckt
Justerbar flödestid
Funktionell princip
Nominell diameter
Inbyggnadsmått
Låsmekanism
Material delar
Typ av blandning
ATT-WS-POPUWASTESET
Säkerhetsavstängning
Ljud isolering
ATT-WS-SPOUT
Sprut kastare
Ytfinish hölje
yt finish
Passande ytfinish
Temperaturstopp
ATT-WS-TRANSFORMER
Typ av montering

Nej
Nej
Manual
DN 15
G 1/2 B
Överdel av keramik
Mässing
Med termostat
Nej
Nej
Nej
ROTATING-BOT
40 mm
Förkromad
Förkromad
polerad
Ja
Nej
Väggmontering





## KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

**Modell-Linie: F5L | F5LT1112**  
Kranar | Manuella kranar

Typ av operation

Manuell operation

Typ av kran

Tvågreppsblandare

Vattenanslutning

S-anslutningar

Accentfärg

utan

Basfärg

Kromat utseende (glansigt)