


KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1114
Kranar | Manuella kranar

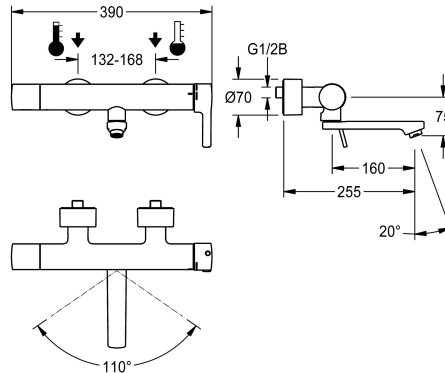

KWC-No.

3600003807

Projection 195 mm

3600003809

Projection 135 mm

3600003852

Projection 255 mm

Sprut kastare

100 mm

40 mm

160 mm

NEW


F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting with lockable swivelling spout, for sanitary facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled

from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 255 mm projection. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

Technical Data

Nedtryckt
Justerbar flödestid
Funktionell princip
Nominell diameter
Inbyggnadsmått
Låsmekanism
Material delar
Typ av blandning
Övergripande djup
Total bredd
ATT-WS-POPUPWASTESET
Säkerhetsavstängning
Ljud isolering
ATT-WS-SPOUT
Sprut kastare
Ytfinish hölje
yt finish
Passande ytfinish
Temperaturstopp

Nej
Nej
Manual
DN 15
G 1/2 B
Överdel av keramik
Mässing
Med termostat
275 mm
340 mm
Nej
Nej
Nej
ROTATING-BOT
160 mm
Förkromad
Förkromad
polerad
Ja





KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT1114
Kranar | Manuella kranar

ATT-WS-TRANSFORMER

Typ av montering

Typ av operation

Typ av kran

Vattenanslutning

Accentfärg

Basfärg

Nej

Väggmontering

Manuell operation

Tvågreppsblandare

S-anslutningar

utan

Kromat utseende (glansigt)