


KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT2104
Showers | Manual shower

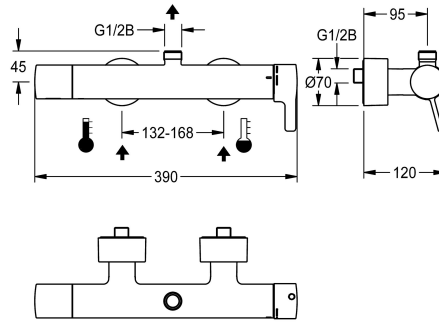

KWC-No.

360003857

F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting, for shower facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing with outlet on top, G 3/4 B, for installation of outlet bend or wall-mounted shower pipe. All-metal


construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

NEW

Technical Data

| |
|--------------------------------|
| additional connections |
| circulation |
| connection with pay water disp |
| adjustable flow time |
| functional principle |
| for hand shower |
| diameter nominal |
| Locking mechanism |
| material casing |
| material fitting |
| type of mixing |
| overall depth |
| overall height |
| overall width |
| protective shutdown |
| shower pipe draining |
| sound insulation |
| surface finish casing |
| surface finish fitting |
| surface treatment fitting |
| temperature limit |
| with transformer/power supply |

| |
|----------------------|
| no |
| no |
| not possible |
| no |
| manual |
| no |
| DN 15 |
| Top section, ceramic |
| brass |
| brass |
| with thermostat |
| 140 mm |
| 70 mm |
| 340 mm |
| no |
| no |
| no |
| chromed |
| chromed |
| polished |
| yes |
| no |



KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT2104

Showers | Manual shower

| | |
|------------------------------|----------------------|
| type of mounting | wall mounting |
| type of operation | manual operation |
| type of shower | wall fitting |
| water connection | S-connections |
| position of water connection | from backside |
| Accent colour | none |
| Basic colour | chrome-look (glossy) |

Optional Accessories



Bent outlet

2030050434
ACXX2005



Bent outlet

2030050435
ACXX2006



Shower pipe

2030041522
ACSX2002