


KWC F5E-Therm

Electronic thermostatic wall-mounted mixer with battery operation

Modell-Linie: F5E | F5ET1103

Taps | Electronic taps

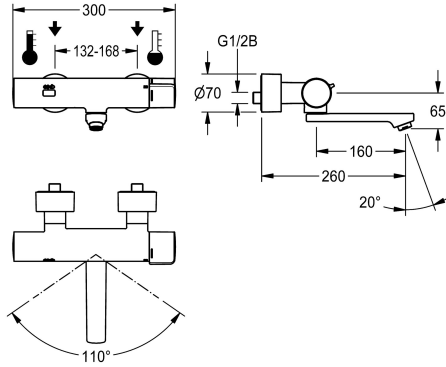

KWC-No.

3600004010
Projection 200 mm

3600004009
Projection 145 mm

3600004011
Projection 260 mm

spout projection

215 mm

155 mm

275 mm

NEW

F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Opto-electronic control, activation on hand reflection. Thermostat with metal handle with adjustable, turn-proof temperature stop. With the option of manual thermal disinfection. For connection to hot and cold water. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished chromium-plated brass. Laminar jet controller with integrated flow rate controller 6.0

l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 260 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data. With facility for parameterisation and communication via optional bidirectional remote control or C-module unit with the necessary app.

Technical Data

with backflow preventer

compatible A3000 open

default automatic hygiene flush

default flow time

depressurised

with filter

adjustable flow time

functional principle

hygiene flushing

diameter nominal

inlet size

Locking mechanism

material fitting

maximum flow time

minimum flow pressure

minimum flow time

type of mixing

number of batteries

Parameterization

Pop-up waste set

yes

no

24h after the last activity

10 Seconds

no

yes

yes

electronic self-closing

yes

DN 15

G 1/2 B

Top section, non-ceramic

brass

255 Seconds

1 bar


1 Seconds

with thermostat

1

remote control

no



KWC F5E-Therm

Electronic thermostatic wall-mounted mixer with battery operation

Modell-Linie: F5E | F5ET1103

Taps | Electronic taps


| | |
|-------------------------------|-----------------------------|
| power supply connection | Battery 6 V |
| power consumption | 1.5 Voltampere |
| Type of power supply | Battery |
| protective system IP | IP59K |
| with rosettes/cover plate | yes |
| protective shutdown | yes |
| sound insulation | no |
| Spout | rotating, bottom |
| spout projection | 275 mm |
| surface finish fitting | chromed |
| surface treatment fitting | polished |
| temperature limit | yes |
| thermal disinfection | manual thermal disinfection |
| with transformer/power supply | no |
| type of batteries | CR-P2 Lithium battery 6V |
| type of mounting | wall mounting |
| type of operation | sensor operation |
| type of sensor | opto-electronic sensor |
| type of tap | bib tap |
| volume flow rate at 3 bar | 0.1 l/s |
| water connection | S-connections |
| Accent colour | none |
| Basic colour | chrome-look (glossy) |

Optional Accessories



Theft-proof housing for aerator

2000104778
ZTAPS0005



C-module unit for compatible KWC electronic wall-mounted mixers

3600008377
ACET9003