


KWC F5S-Therm
Shower panel made of stainless steel with diverter between overhead shower and hand shower

Modell-Linie: F5 | F5ST2046
Duschar | Självstängande duschar

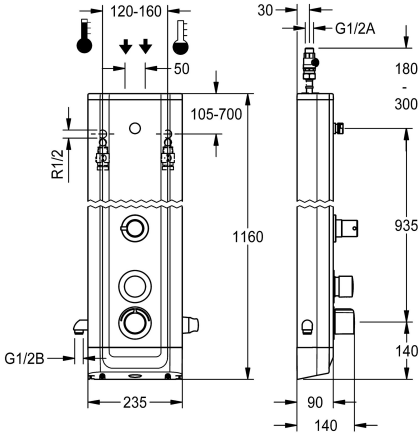

KWC-No.

3600004618

NEW

F5S-Therm shower panel made of stainless steel for wall mounting with DN 15 self-closing thermostatic mixer and diverter between overhead shower and hand shower. Hydraulically controlled, connects to hot water and cold water. Function block with integrated FRAMIC self-closing cartridge, thermostat and pre-assembled hygiene unit including sensor with control electronics to perform automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid-operated flush valve cartridge necessary) and storage of statistical data. FRAMIC self-closing cartridge, low maintenance and stagnation free, with ceramic disc technology, self closing, flow pressure independent due to medium-independent design. Flow duration can be adjusted by any increment. Thermostat with metal handle with adjustable and turn-proof temperature stop and option for manual thermal disinfection. All-metal construction, visible parts polished chrome-plated. Connecting nozzles for separately required DN 15 KWC shower head with pre-fitted flow regulator 9.0 l/min. Stainless steel

housing with raised function surface and cover caps made of plastic. Hand shower connection on the left and chrome-plated plastic hand shower holder on the right, both pre-assembled on the side. Connector hoses with lockable water flow control with backflow preventer and strainer. Activated hygiene flushing, fixed interval of 24 hours. With option for parameterization and communication via optional, bidirectional remote control. Optional hygiene unit for battery operation with 6 V lithium battery (CR-P2) per fitting or separate power supply via plug-in power supply unit 6.75 V/12 V DC.


Housing dimensions 235 x 1160 x 90 mm (W x H x D)

Shower head, hand shower with shower hose and battery compartment including battery or power supply unit with extension cable must be ordered separately.

Technical Data

extra anslutning
med eterströmningsskydd
Cirkulation
A3000 open-kompatibel
Samband med lön myntopererad behållare
Standard automatisk hygien spolning
med filter
Justerbar flödestid
Funktionell princip
för handdusch
Hygienspolning
Nominell diameter
Inbyggnadsmått
Låsmekanism
Material hölje
materialkod hölje
Material delar
Maximal flödestid

för handdusch med strömbrytare
Ja
Nej
Nej
Inte möjligt
fast intervall 24 timmar
Ja
Ja
Hydraliskt självstängande
Ja
Ja
DN 15
G-1-2-A
Överdel av keramik
Rostfritt stål
1.4301
Mässing
35 Sekunder





KWC F5S-Therm
Shower panel made of stainless steel with diverter between overhead shower and hand shower

Modell-Linie: F5 | F5ST2046
Duschar | Självstängande duschar

Minimalt flödestryck	1.5 bar
Minimal flödes tid	5 Sekunder
Typ av blandning	Med termostat
Övergripande djup	90 mm
Total höjd	1,160 mm
Total bredd	235 mm
Parametrisering	Fjärrkontroll
Kraft försörjnings anslutning	6-12-VDC
Kraftanslutning	Från toppen/ baksidan
Typ av strömförsörjning	Övriga
Skydds system IP	59K
med rosetter/täckplatta	Ja
Säkerhetsavstängning	Nej
Dusch rör dränering	Nej
Duschhuvud	för separat duschhuvud
med duschset	Nej
Ljud isolering	Nej
Ytfinish hölje	Satin yta
yt finish	Färgkromad
Passande ytfinish	polerad
Temperaturstopp	Ja
terminal för desinfektion	Ja
ATT-WS-TRANSFORMER	Nej
Typ av montering	Väggmontering
Typ av operation	Manuell operation
Typ av sensor	Utan elektronisk sensor
Typ av dusch	Duschpanel
Volymflöde vid 3 bar	0.15 l/s
Vattenanslutning	Slang
Vattenanslutning	Från toppen/ baksidan
med tvålköpp	Nej
Accentfärg	Kromat utseende (glansigt)
Basfärg	Utseende i rostfritt stål

Nödvändiga tillbehör



Duschhuvud



Duschhuvud



Duschhuvud




Battery compartment

KWC F5S-Therm

Shower panel made of stainless steel with diverter between overhead shower and hand shower

Modell-Linie: F5 | F5ST2046
Duschar | Självstängande duschar


2030054255
SHAS0011



Power supply unit

2030039477
ACEX9001

2030054254
SHAC0011




Extension cable 5 m

2030043814
ACEX9010

2030054793
SHMU0011


3600002063
ACEX9023

Extratillbehör



Flow controller 6.0 l/min

2030027586
ESHHE0004



Flow controller 12.0 l/min

2000104783
ESHHE0002




Hand shower

2030051216
ACXX2007



Shower bracket

2030051217
ACXX2008



Set for thermal disinfection

2030057940
ACXT2001



Bidirectional remote control for electronic fittings F3 and F5

2030036654
ACEX9005



2-button remote control for fittings F3 and F5

2030036849
ACEX9004




Housing extension for F5 shower panels made of stainless steel

2030057066
ACXX2011

KWC F5S-Therm


Shower panel made of stainless steel with diverter between overhead shower and hand shower

Modell-Linie: F5 | F5ST2046
Duschar | Självstängande duschar




Housing extension for F5 shower panels made of stainless steel

2030057067
ACXX2012




Housing extension for F5 shower panels made of stainless steel

2030057068
ACXX2013




Housing extension for F5 shower panels made of stainless steel

2030057069
ACXX2014




Housing extension for F5 shower panels made of stainless steel

2030057070
ACXX2015



Shower gel dish for F5 shower panels made of stainless steel

2030057077
ACXX2021



Connection set for shower panel


2000104916
ZSHOW0006

Reservdelar



FRAMIC Self-closing cartridge

2030046145
ASSX9001



Solenoid valve cartridge

2030003033
EAQFU0001



Stainless steel care set

2000109019
ZWSPL0024



Cleaning product CHROMOL

2000105091
ZWSPL0023