


KWC F5E-Therm

Electronic thermostatic wall-mounted mixer with battery operation and pre-fitted C-module unit

Modell-Linie: F5E | F5ET1117
Taps | Electronic taps

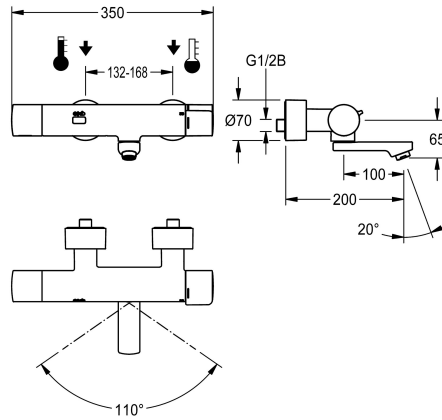

KWC-No.

3600008356
with 200 mm projection

3600008354
Projection 145 mm

3600008357
Projection 260 mm

spout projection

215 mm

155 mm

275 mm

NEW


F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Opto-electronic control, activation on hand reflection. Pre-fitted C-module unit for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app. Thermostat with metal handle with adjustable, turn-proof temperature stop. With the option of manual thermal disinfection. For connection to hot and cold water. Control electronics, solenoid valve

cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished chromium-plated brass. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 200 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data.

Technical Data

| |
|---------------------------------|
| with backflow preventer |
| compatible A3000 open |
| default automatic hygiene flush |
| depressurised |
| with filter |
| adjustable flow time |
| functional principle |
| hygiene flushing |
| diameter nominal |
| inlet size |
| Locking mechanism |
| material fitting |
| maximum flow time |
| minimum flow pressure |
| minimum flow time |
| type of mixing |
| number of batteries |
| Parameterization |
| Pop-up waste set |
| power supply connection |

| |
|-----------------------------|
| yes |
| no |
| 24h after the last activity |
| no |
| yes |
| yes |
| electronic self-closing |
| yes |
| DN 15 |
| G 1/2 B |
| Top section, non-ceramic |
| brass |
| 255 Seconds |
| 1 bar |
| 1 Seconds |
| with thermostat |
| 1 |
| remote control / app |
| no |
| Battery 6 V |



KWC F5E-Therm

Electronic thermostatic wall-mounted mixer with battery operation and pre-fitted C-module unit

Modell-Linie: F5E | F5ET1117

Taps | Electronic taps

| | |
|-------------------------------|-----------------------------|
| power consumption | 1.5 Voltampere |
| Type of power supply | Battery |
| protective system IP | IP59K |
| with rosettes/cover plate | yes |
| protective shutdown | yes |
| sound insulation | no |
| Spout | rotating, bottom |
| spout projection | 215 mm |
| surface finish fitting | chromed |
| surface treatment fitting | polished |
| temperature limit | yes |
| thermal disinfection | manual thermal disinfection |
| with transformer/power supply | no |
| type of batteries | CR-P2 Lithium battery 6V |
| type of mounting | wall mounting |
| type of operation | sensor operation |
| type of sensor | opto-electronic sensor |
| type of tap | bib tap |
| volume flow rate at 3 bar | 0.1 l/s |
| water connection | S-connections |
| Accent colour | none |
| Basic colour | chrome-look (glossy) |

Optional Accessories



Theft-proof housing for aerator

2000104778
ZTAPS0005