


## KWC F5E-Therm

Electronic thermostatic wall-mounted mixer with battery operation and pre-fitted C-module unit

Modell-Linie: F5E | F5ET1118  
Kranar | Elektroniska kranar

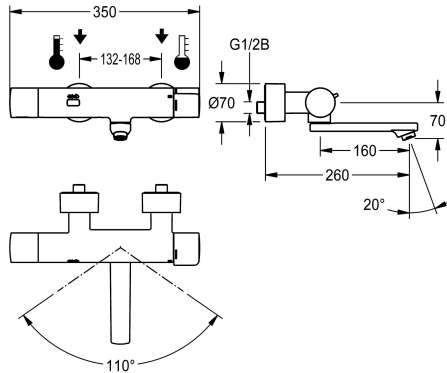

### KWC-No.

**3600008356**  
with 200 mm projection

**3600008354**  
Projection 145 mm

**3600008357**  
Projection 260 mm

### Sprut kastare

215 mm

155 mm

275 mm

**NEW**


F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Opto-electronic control, activation on hand reflection. Pre-fitted C-module unit for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app. Thermostat with metal handle with adjustable, turn-proof temperature stop. With the option of manual thermal disinfection. For connection to hot and cold water. Control electronics, solenoid valve

cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished chromium-plated brass. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 260 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data.

### Technical Data

med eterströmningsskydd
A3000 open-kompatibel
Standard automatisk hygien spolning
Nedtryckt
med filter
Justerbar flödestid
Funktionell princip
ATT-WS-HYGIENE-FLUSH
Nominell diameter
Inbyggnadsmått
Låsmekanism
Material delar
Maximal flödestid
Minimalt flödestryck
Minimal flödes tid
Typ av blandning
Antal batterier
Parametrisering
ATT-WS-POPUWASTESET
Kraft försörjnings anslutning

Ja
Nej
24 timmar efter den senaste operationen
Nej
Ja
Ja
Elektronisk självstängande
Ja
DN 15
G 1/2 B
Övre delen icke-keramisk
Mässing
255 Sekunder
1 bar
1 Sekunder
Med termostat
1
Fjärrkontroll / app
Nej
Batteri 6 V



**KWC F5E-Therm**

Electronic thermostatic wall-mounted mixer with battery operation and pre-fitted C-module unit

**Modell-Linie: F5E | F5ET1118**

Kranar | Elektroniska kranar

Kraft förbrukning	1.5 Voltampere
Typ av strömförsörjning	BATTERY
Skydds system IP	59K
med rosetter/täckplatta	Ja
Säkerhetsavstängning	Ja
Ljud isolering	Nej
ATT-WS-SPOUT	ROTATING-BOT
Sprut kastare	275 mm
yt finish	Förkromad
Passande ytfinish	polerad
Temperaturstopp	Ja
terminal för desinfektion	MANUAL
ATT-WS-TRANSFORMER	Nej
Typ av batterier	CR-P2
Typ av montering	Väggmontering
Typ av operation	Sensor styrning
Typ av sensor	Utan elektronisk sensor
Typ av kran	Tvågreppsblandare
Volymlöde vid 3 bar	0.1 l/s
Vattenanslutning	S-anslutningar
Accentfärg	utan
Basfärg	Kromat utseende (glansigt)