


## KWC F5S-Therm

Self-closing thermostatic wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5S | F5ST1104  
Taps | Self closing taps

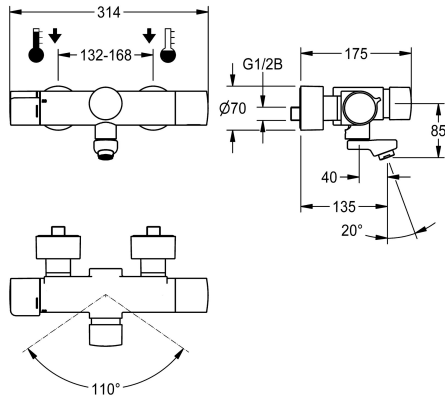

### KWC-No.

**360008420**  
Projection 195 mm

**360008409**  
Projection 135 mm

**360008421**  
Projection 255 mm

### spout projection

195 mm

135 mm

255 mm

NEW


F5S-Therm self-closing thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Hydraulically controlled, connects to hot water and cold water. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. FRAMIC self-closing cartridge, hydraulically controlled, low maintenance and stagnation free, with ceramic disc technology, self closing, flow pressure independent due to medium-independent design. Fully adjustable flow time, thermostat with metal handle with adjustable and turn-proof

temperature stop, with option for performing manual thermal disinfection. Scald-protected, safe-touch housing, all-metal construction, polished chromium-plated brass. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Reach 135 mm. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

### Technical Data

with backflow preventer
compatible A3000 open
default automatic hygiene flus
depressurised
with filter
adjustable flow time
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material fitting
maximum flow time
minimum flow pressure
minimum flow time
type of mixing
number of batteries
Parameterization
Pop-up waste set

yes
no
fixed interval 24 hours
no
yes
yes
hydraulic self-closing
yes
DN 15
G 1/2 B
Top section, ceramic
brass
35 Seconds
1 bar
5 Seconds
with thermostat
1
app
no



## KWC F5S-Therm

Self-closing thermostatic wall-mounted mixer with pre-fitted hygiene unit

### Modell-Linie: F5S | F5ST1104

Taps | Self closing taps

power supply connection	Battery 6 V
Type of power supply	Battery
protective system IP	IP59K
with rosettes/cover plate	yes
protective shutdown	no
sound insulation	no
Spout	rotating, bottom
spout projection	135 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	manual thermal disinfection
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	wall mounting
type of operation	manual operation
type of tap	bib tap
volume flow rate at 3 bar	0.1 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

### Optional Accessories



#### Theft-proof housing for aerator

**2000104778**  
ZTAPS0005