




KWC MIRA
Washplace unit Water-Soap-Air

Modell-Linie: MIRA | MIRX101
Baby changing tables | All-In-One

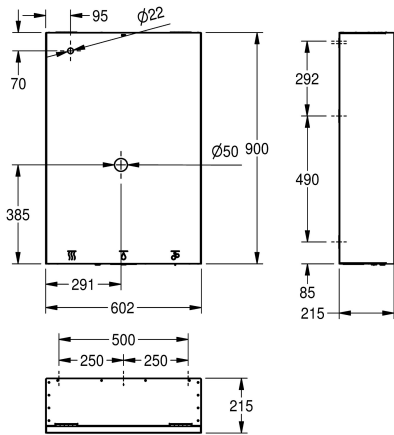

KWC-No.
3600009111 With satin surface finish
3600009112 With glossy white surface finish
3600007029 With matt black surface finish

Accent colour	Accent colour
stainless steel	stainless steel
white	white
black	black

MIRA, Integrated wash place mirror unit with water soap air for wall mounting, touch free optoelectrical controlled, suitable for premixed water, soap pump for liquid / foam soap and hand dryer, illuminated pictograms above the respective sensor position, cabinet housing made of stainless steel, satin finished, mirrored

door, door hinged at top with gas spring, cylindrical lock with standard key.
Dimensions 600 x 900 x 215 mm (W x H x D)

Technical Data

input supply voltage Hz
filling quantity
filling quantity uom
lock
material
material code
material thickness
overall depth
overall height
overall width
protective system IP
surface finish
type of mounting
type of operation
type of soap container
Accent colour
air velocity
blower output
input supply voltage Hz
heating power
material
material code

50 Hertz (1/second)
1,600
ml
key-lock
stainless steel
1.4301 Chrome Nickel steel V2A
1.2 mm
215 mm
900 mm
600 mm
IP20
satin finished
wall mounting
sensor operation
integrated refillable tank
stainless steel
adjustable
80 Cubic Meter/Hour
50 Hertz (1/second)
500 Watt
stainless steel
1.4301 Chrome Nickel steel V2A



KWC MIRA
Washplace unit Water-Soap-Air

Modell-Linie: MIRA | MIRX101
Baby changing tables | All-In-One

material thickness	1.2 mm
motor power	500 Watt
overall depth	215 mm
overall height	900 mm
overall width	600 mm
protective system IP	IP20
sound level	76.2 Decibels (A Weighting)
surface finish	satin finished
type of mounting	wall mounting
type of operation	sensor operation
Accent colour	stainless steel
calculation flow rate cold wat	0.02 l/s
calculation flow rate hot wate	0.02 l/s
diameter nominal	DN 15
inlet size	G 3/8 B
material casing	stainless steel
material code casing	1.4301 Chrome Nickel steel V2A
minimum flow pressure	1 bar
overall depth	215 mm
overall height	900 mm
overall width	600 mm
power supply connection	230 V AC
power consumption	1,100 Voltampere
Type of power supply	Mains power supply
protective system IP	IP20
Spout	fixed
type of mounting	wall mounting
type of operation	sensor operation
type of sensor	opto-electronic sensor
volume flow rate at 3 bar	0.02 l/s
Accent colour	stainless steel
calculation flow rate cold wat	0.02 l/s
calculation flow rate hot wate	0.02 l/s
minimum flow pressure	1 bar
overall depth	215 mm
overall height	900 mm
overall width	600 mm
power supply connection	230 V AC
power consumption	1,100 Voltampere
protective system IP	IP20
volume flow rate at 3 bar	0.02 l/s