


KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1004
Taps | Self closing taps

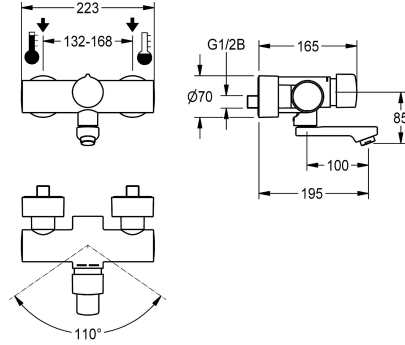

KWC-No.

2030032992

Projection 195 mm

2030032991

Projection 135 mm

2030032993

Projection 255 mm

2030040314

with projection 135 mm and aerator with flow regulator 3.0 l/min

2030040316

with projection 195 mm and aerator with flow regulator 3.0 l/min

2030040317

with projection 255 mm and aerator with flow regulator 3.0 l/min

spout projection

195 mm

135 mm

255 mm

135 mm

195 mm

255 mm

volume flow rate at 3 bar

0.1 l/s

0.1 l/s

0.1 l/s

0.05 l/s

0.05 l/s

0.05 l/s

F5S-Mix self-closing wall-mounted mixer DN 15 as single-mixer tap for wall mounting with lockable swivelling spout, for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With

adjustable, turn-proof temperature stop. Connects to hot and cold water. All-metal construction, high-polished chromium-plated brass. Laminar jet controller with integrated flow regulator 6.0 l/min. With adjustable and lockable connections with backflow preventer and strainers, completely covered with depth-adjustable screw rosettes. Projection 195 mm.

Technical Data

with backflow preventer

yes

calculation flow rate cold wat

0.07 l/s

calculation flow rate hot wate

0.07 l/s

compatible A3000 open

no

depressurised

no

with filter

yes

adjustable flow time

yes

functional principle

hydraulic self-closing

hygiene flushing

no

diameter nominal

DN 15

inlet size

G 1/2 B

Locking mechanism

Top section, ceramic

material fitting

brass-lock

maximum flow time

35 Seconds

minimum flow pressure

0.5 bar

minimum flow time

5 Seconds

type of mixing

yes



KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1004
Taps | Self closing taps

| | |
|---------------------------|----------------------|
| Pop-up waste set | no |
| with rosettes/cover plate | yes |
| protective shutdown | no |
| sound insulation | no |
| Spout | rotating, bottom |
| spout projection | 195 mm |
| surface finish fitting | chromed |
| surface treatment fitting | polished |
| temperature limit | yes |
| thermal disinfection | no |
| type of mounting | wall mounting |
| type of operation | manual operation |
| type of tap | bib tap |
| volume flow rate at 3 bar | 0.1 l/s |
| water connection | S-connections |
| Accent colour | none |
| Basic colour | chrome-look (glossy) |


Optional Accessories



Theft-proof housing for aerator

2000104778
ZTAPS0005

Spare Parts



Screw rosette



Mounting set



Plug chromed



Handle push cap

KWC F5S-Mix Self-closing wall-mounted mixer

Modell-Linie: F5S | F5SM1004
Taps | Self closing taps

2030046777
ASXX9003



Temperature stop

2030046189
ASSM9002



Swivel spout, 100 mm

2030032671
ASXX1001

2030003401
EAQLT0009



Safety ring

2030048357
ASXX9003

2030053006
ASSX9004



FRAMIC self-closing mixing cartridge

2030046185
ASSM9001

2030050753
ASSM9004



Laminar jet regulator

2030012352
ETAPS0037