
DELABIE | KWC Professional

KWC

EXOS. Electronic pillar mixer with battery operation

Modell-Linie: EXOS | EXOS130 | 2030036618 | EAN/GTIN: 7612982239359
Taps | Electronic taps



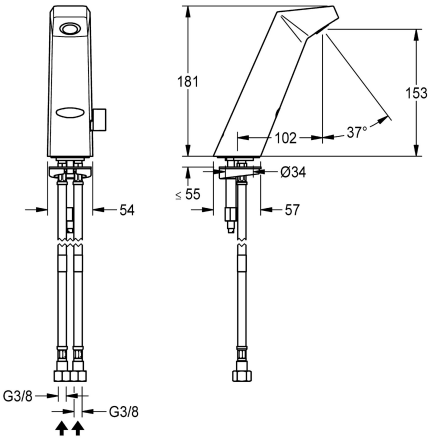

Article Number

2030036618

EXOS. pillar mixer DN 15 for sanitary facilities, opto-electronically controlled. For connection to hot and cold water via hoses with integrated backflow preventer and strainers. Control electronics, solenoid valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, stainless steel. Temperature lever, chromium-plated, with adjustable, turn-proof temperature stop. Anti-theft aerator, design SLIM, with integrated flow regulator 5.0 l/min. Activated water hygiene flushing 24 hours after last activation, safety switch-off with continuous reflection. With option for parameterization via optional remote control.

Technical Data

with backflow preventer	yes
calculation flow rate cold wat	0.07 l/s
calculation flow rate hot wate	0.07 l/s
default automatic hygiene flus	24h after the last activity
default flow time	60 Seconds
depressurised	no
with filter	yes
functional principle	electronic self-closing
hygiene flushing	yes
diameter nominal	DN 15
inlet size	G 3/8
Locking mechanism	Top section, non-ceramic
material fitting	stainless steel
minimum flow pressure	1 bar
type of mixing	yes
number of batteries	1
Parameterization	remote control
Pop-up waste set	no
power supply connection	Battery 6 V
position of power connection	from bottom
power consumption	1.5 Voltampere
Type of power supply	Battery
protective system IP	IP65
with rosettes/cover plate	no

DELABIE | KWC Professional

KWC

EXOS. Electronic pillar mixer with battery operation

Modell-Linie: EXOS | EXOS130 | 2030036618 | EAN/GTIN: 7612982239359
Taps | Electronic taps

protective shutdown	yes
sound insulation	no
Spout	fixed
spout projection	102 mm
surface finish fitting	satin finished
surface treatment fitting	sanded
temperature limit	yes
thermal disinfection	no
with transformer/power supply	no
type of batteries	CR-P2 Lithium battery 6V
type of mounting	tap hole
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	pillar tap
volume flow rate at 3 bar	0.08 l/s
water connection	hose (gland nut)
Accent colour	chrome-look (glossy)
Basic colour	stainless steel-look

Optional Accessories



Remote control


2000101087
ZAQUA091



5.0 l/min aerator, angle-adjustable

2030041326
ACXX1002

Spare Parts









DELABIE | KWC Professional


KWC

EXOS. Electronic pillar mixer with battery operation

Modell-Linie: EXOS | EXOS130 | 2030036618 | EAN/GTIN: 7612982239359
Taps | Electronic taps

Aerator 5.0 l/min

2030041011
ASXX1004



Lithium battery 6 V

2000104846
EPRTR0008



Fastening set

2030041474
EEXOS0002



Spare part set

2000105106
EPRTR0009



Mounting key

2030041329
ACXX1003

5.0 l/min aerator, angle-adjustable

2030041326
ACXX1002

Laminar jet regulator

2030012352
ETAPS0037

Lever completed

2030041472
EEXOS0001