


KWC F5L-Therm

F5L-Therm thermostatic single-lever wall-mounted mixer with hand shower connection and pre-fitted hygiene unit

Modell-Linie: F5L | F5LT2112
Showers | Manual shower

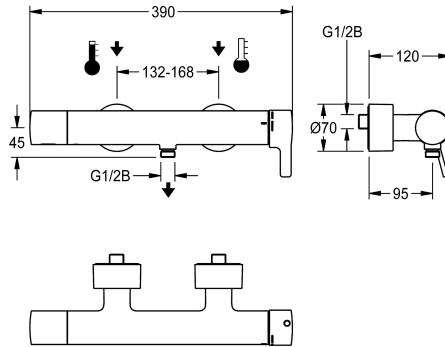

KWC-No.

3600003858


F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting, for shower facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing with hand shower connection, G 1/2 B. All-metal construction, polished chromium-plated brass. Volume-

reduced, smooth water lines made of brass without nickel coating, decoupled from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

NEW

Technical Data

additional connections	no
circulation	no
connection with pay water disp	not possible
with filter	yes
adjustable flow time	no
functional principle	manual
for hand shower	yes
diameter nominal	DN 15
inlet size	G 1/2 B
Locking mechanism	Top section, ceramic
material casing	brass-look
material fitting	brass-look
type of mixing	with thermostat
overall depth	140 mm
overall height	70 mm
overall width	340 mm
protective shutdown	no
shower pipe draining	no
sound insulation	no
surface finish casing	chromed
surface finish fitting	chromed
surface treatment fitting	polished



KWC F5L-Therm

F5L-Therm thermostatic single-lever wall-mounted mixer with hand shower connection and pre-fitted hygiene unit

Modell-Linie: F5L | F5LT2112

Showers | Manual shower

temperature limit	yes
with transformer/power supply	no
type of mounting	wall mounting
type of operation	manual operation
type of shower	wall fitting
water connection	S-connections
position of water connection	from backside
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Hand shower

2030051216
ACXX2007

Shower bracket

2030051217
ACXX2008