


KWC

Emergency shower activated by a pull-rod with water supply from ceiling or from left or right

Modell-Linie: EMERGENCYSHOWERS | FAID0003

Emergency showers | Whole body showers

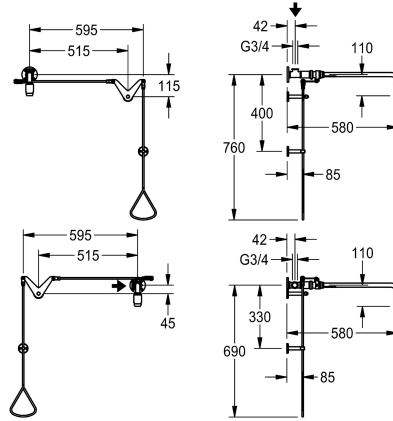

KWC-No.

2030019025

Pull-rod operated emergency shower, surface mounting near the door, with water supply from ceiling and operation with triangle handle right or water supply from both sides and operation left or right near the exit. Valve with wall bracket and emergency showerhead over the middle of the door. Non-self-closing, the water flow is stopped by pushing up the pull rod, green EPS coating (RAL

6032), complies with EN 15154, Part 1. Includes the "emergency shower" safety symbol on an adhesive label in compliance with ISO 3864, Part 1. Volumetric flow rate approx. 65 l/min at 1 bar pressure, approx. 110 l/min at 3 bar pressure, water connection G 3/4.

Technical Data

colour	green
spout projection	588 mm
type of connection	pipe connection
type of fitting	to doors
volume flow rate at 1 bar	1.08 l/s
volume flow rate at 3 bar	1.83 l/s

colour	green
spout projection	588 mm
type of connection	pipe connection
type of fitting	to doors
volume flow rate at 1 bar	1.08 l/s
volume flow rate at 3 bar	1.83 l/s

Optional Accessories



Extension for coupling-rod

2030061050
ZFAID0003


Spare Parts

KWC

Emergency shower activated by a pull-rod with water supply from ceiling or from left or right

Modell-Linie: EMERGENCYSHOWERS | FAID0003

Emergency showers | Whole body showers



KWC

Emergency showerhead

2030018810
FAID0001

Safety label emergency shower

2000101152
FAID904
