


KWC FX-M
Wash place unit Water-Soap-Air

Modell-Linie: FX | FXCD1001M
Baby changing tables | All-In-One

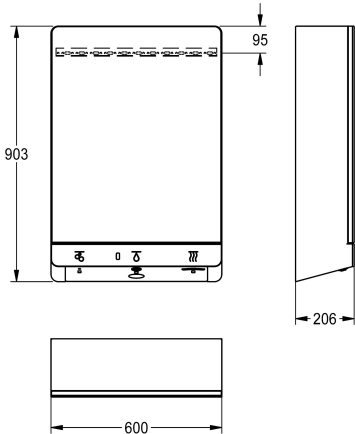

KWC-No.
2030063219

FX-M wash place unit Water-Soap-Air for wall mounting, touch free opto-electronically controlled. For hot and cold water connectivity. Thermostat for mounting onto angle valve with installation set for preset delivery of premixed hot water, soap pump for liquid soap and hand dryer. Lighting up of pictograms above the respective sensor position as well as start of wash place lighting indicate user detection. The pictogram of the active function is illuminated maximally. Cabinet housing made of powder coated stainless steel, white, mirrored door, door hinge left and cylinder lock.

Minimum flow pressure 1.0 bar
Volume of water flow 6 l/min at 3 bar flow pressure
Supply voltage 230 V AC, 50/60 Hz
Overall power 1000 W
Protection Degree IPX1
Hand Dryer Air Volume 80 m3/h = 22 l/s
Hand Dryer Air Velocity 95-115 m/s
Dimensions 600 x 903 x 206 mm (W x H x D)

Technical Data

power supply connection	230 V AC
power consumption	1,200 Voltampere
protective system IP	Shower System components 1

Optional Accessories



QUADRO-FX single washbasin
2030058091
ANMW0036

Bidirectional remote control for
electronical fittings F3 and F5
2030036654
ACEX9005


2-button remote control for fittings F3
and F5
2030036849
ACEX9004

Spare Parts




KWC FX-M
Wash place unit Water-Soap-Air

Modell-Linie: FX | FXCD1001M
Baby changing tables | All-In-One



Solenoid valve cartridge

2030045522
ACXX9002



Aerator 5.0 l/min

2030041011
ASXX1004



Power supply unit

2030068573
ASEX1031