


KWC F5L-Therm

Single-lever thermostatic mixer for tap unit or wall flange

Modell-Linie: F5L | F5LT1033
Taps | Manual taps

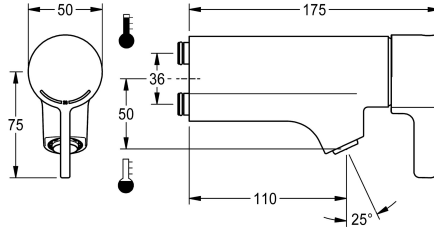

KWC-No.

2030065268

F5L-Therm single-lever thermostatic mixer

F5L-Therm single-lever thermostatic mixer DN 15 with slanted drain for mounting on tap unit or separate wall flange, for sanitary facilities. Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc

technology. For connection to hot and cold water. All-metal construction, high-polished chrome-plated brass. Anti-theft aerator, SLIM design, with integrated flow regulator 5.0 l/min. Connections positioned above one another with backflow preventers.

Technical Data

with backflow preventer
calculation flow rate cold wat
calculation flow rate hot water
depressurised
with filter
functional principle
hygiene flushing
diameter nominal
Locking mechanism
material fitting
minimum flow pressure
type of mixing
Pop-up waste set
with rosettes/cover plate
protective shutdown
sound insulation
Spout
spout projection
surface finish fitting
surface treatment fitting
temperature limit
thermal disinfection
type of mounting
type of operation
type of tap

yes
0.06 l/s
0.06 l/s
no
yes
manual
no
DN 15
Top section, non-ceramic
brass-look
1 bar
with thermostat
no
no
yes
no
fixed
110 mm
chromed
polished
yes
no
mounted on product
manual operation
for fitting unit



KWC F5L-Therm

Single-lever thermostatic mixer for tap unit or wall flange

Modell-Linie: F5L | F5LT1033

Taps | Manual taps

volume flow rate at 3 bar

0.08 l/s

water connection

plug connection

Accent colour

none

Basic colour

chrome-look (glossy)

Mandatory Accessories



Wall flange

2030058762
ACXM1002



Single clamping bridge

2030058826
ACXM1003



Double clamping bridge

2030059971
ACXM1004

Optional Accessories




5.0 l/min aerator, angle-adjustable

2030041326
ACXX1002



3.0 l/min. aerator

2030041424
ASXX1008



Aerator 1.8 l/min


2030041442
ACXX1005

Spare Parts

KWC F5L-Therm


Single-lever thermostatic mixer for tap unit or wall flange

Modell-Linie: F5L | F5LT1033
Taps | Manual taps



Guide bushing

2030023924
ETAPS0040



Aerator 5.0 l/min

2030041011
ASXX1004



Mounting key

2030041329
ACXX1003