


KWC F5L-Therm
Stainless steel shower panel with hand shower fitting

Modell-Linie: F5L | F5LT2021
Showers | Manual shower

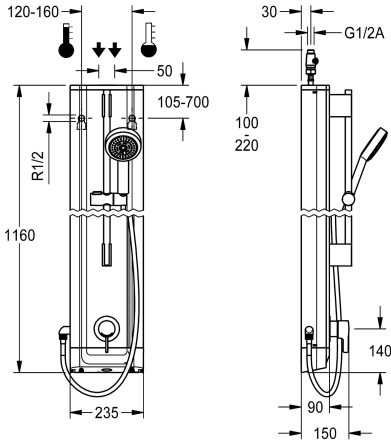

KWC-No.

2030066510

F5L-Therm stainless-steel shower panel for wall mounting with single-lever thermostat DN 15 and hand shower fitting kit. For connection to hot and cold water. Function block with integrated mixing cartridge and pre-assembled hygiene unit including sensor with control electronics to perform automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid-operated flush valve cartridge necessary) and storage of statistical data. Thermostatically-controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop, and ceramic disc technology. All-metal construction, visible parts high-polished, chrome-plated. Pre-fitted chrome-plated brass shower rail with height-adjustable hand shower holder and chrome-plated brass hand shower, shower head with rain jet, diameter 110 mm, shower


hose 900 mm. Housing made of stainless steel with raised function surface and cover caps made of plastic. With adjustable and lockable connections with backflow preventer and strainers. Activated hygiene flushing, fixed interval of 24 hours. With option for parameterization and communication via optional, bidirectional remote control. Optional hygiene unit for battery operation with 6 V lithium battery (CR-P2) per fitting or separate power supply via plug-in power supply unit 6.75 V/12 V DC.

Housing dimensions 235 x 1160 x 90 mm (W x H x D)

Battery compartment including battery or power supply unit with extension cable must be ordered separately.

Technical Data

additional connections	no
with backflow preventer	yes
circulation	no
compatible A3000 open	no
connection with pay water disp	not possible
default automatic hygiene flus	fixed interval 24 hours
with filter	yes
adjustable flow time	no
functional principle	manual
for hand shower	yes
hygiene flushing	yes
diameter nominal	DN 15
inlet size	G 1/2 A
Locking mechanism	Top section, ceramic
material casing	stainless steel
material code casing	1.4301 Chrome Nickel steel V2A
material fitting	brass-look
minimum flow pressure	1 bar
type of mixing	with thermostat
overall depth	90 mm





KWC F5L-Therm
Stainless steel shower panel with hand shower fitting

Modell-Linie: F5L | F5LT2021
Showers | Manual shower

overall height	1,160 mm
overall width	235 mm
Parameterization	remote control
power supply connection	6,75 / 12 V DC
position of power connection	from top / backside
Type of power supply	other
protective system IP	IP59K
with rosettes/cover plate	yes
protective shutdown	no
shower pipe draining	no
with shower set	yes
sound insulation	no
surface finish casing	satin finished
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	yes
with transformer/power supply	no
type of mounting	wall mounting
type of operation	manual operation
type of sensor	opto-electronic sensor
type of shower	shower panel
volume flow rate at 3 bar	0.15 l/s
water connection	hose (gland nut)
position of water connection	from top / backside
with soap dish	no
Accent colour	chrome-look (glossy)
Basic colour	stainless steel-look

Mandatory Accessories



Battery compartment

3600002063

ACEX9023

Power supply unit

2030039477

ACEX9001

Extension cable 5 m

2030043814

ACEX9010

Optional Accessories



KWC F5L-Therm
Stainless steel shower panel with hand shower fitting

Modell-Linie: **F5L | F5LT2021**
Showers | Manual shower




Bidirectional remote control for electronic fittings F3 and F5

2030036654
ACEX9005




2-button remote control for fittings F3 and F5

2030036849
ACEX9004




Solenoid valve cartridge

2030003033
EAQFU0001




Housing extension for F5 shower panels made of stainless steel

2030057066
ACXX2011




Housing extension for F5 shower panels made of stainless steel

2030057067
ACXX2012




Housing extension for F5 shower panels made of stainless steel

2030057068
ACXX2013




Housing extension for F5 shower panels made of stainless steel

2030057069
ACXX2014



Housing extension for F5 shower panels made of stainless steel

2030057070
ACXX2015



Shower gel dish for F5 shower panels made of stainless steel

2030057077
ACXX2021

Spare Parts




KWC F5L-Therm
Stainless steel shower panel with hand shower fitting

Modell-Linie: F5L | F5LT2021
Showers | Manual shower




Hand shower

2030051216
ACXX2007



Rosette

2030048765
ASET2006



Solenoid valve cartridge

2030003033
EAQFU0001



Stainless steel care set

2000109019
ZWSPL0024