


KWC F5E - A3000 open  
electronic washbasin tap for rear panel mounting

Modell-Linie: F5E | F5EV1016  
Taps | Electronic taps

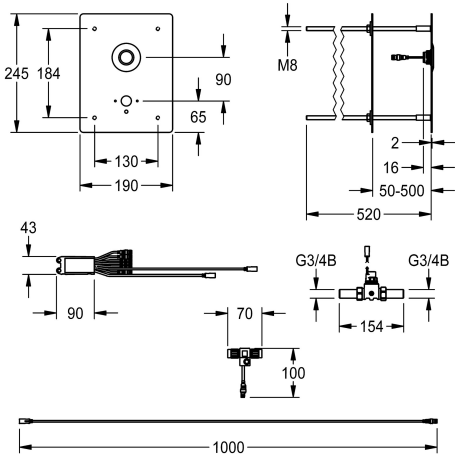

Article Number

2030067882

F5E - A3000 open washbasin mixer DN 15 for concealed mounting. Especially suitable for facilities at risk of vandalism. Electronically controlled, for connection to pre-mixed hot water or cold water. With waterproof electronic module and electric T-junction for connection to system cable, solenoid valve, 190 x 245 x 2 mm stainless steel cover plate for invisible mounting via threaded rods, up to a wall thickness of 50 to 500 mm, including piezo push-button with start/stop function and 2 m extension

cable as well as recess for KWC wall outlet DN 15 (required separately). Connection and maintenance via service room. Activated hygiene flushing 24 hours after the last activity. With facility for parameterization, cleaning deactivation and communication via ECC2 function controller, 24 V DC.

Wall outlet must be ordered separately.

Technical Data

Built-in fitting model
compatible A3000 open
Cover plate height
Cover plate width
default automatic hygiene flus
default flow time
depressurised
with filter
adjustable flow time
functional principle
hygiene flushing
diameter nominal
Locking mechanism
material code casing
material fitting
maximum flow time
minimum flow pressure
minimum flow time
type of mixing
Parameterization
power supply connection
position of power connection

Built-in section
yes
245 mm
190 mm
24h after the last activity
10 Seconds
no
yes
yes
electronic self-closing
yes
DN 15
Top section, non-ceramic
1.4301 Chrome Nickel steel V2A
brass-look
6,500 Seconds
1 bar
1 Seconds
no
network
A3000 open 24 V DC
from top





**KWC** F5E - A3000 open  
electronic washbasin tap for rear panel mounting

**Modell-Linie:** F5E | F5EV1016  
Taps | Electronic taps

Type of power supply	Transformer
protective system IP	IP59K
protective shutdown	yes
sound insulation	no
surface finish casing	satin finished
surface finish fitting	chromed
with transformer/power supply	no
type of mounting	bolt mounting
type of operation	sensor operation
type of sensor	piezo-electronic sensor
type of tap	in-wall tap
volume flow rate at 3 bar	0.46 l/s

**Mandatory Accessories**



Wall outlet for in-wall washbasin taps

**2030071655**  
ACXX1008

Wall outlet for in-wall washbasin taps




**2030071654**  
ACXX1009

Wall outlet for in-wall washbasin taps

**2030071663**  
ACXX1010

ECC2 function controller

**2000108123**  
ZA3OP0011



ECC2 function controller

**2030016282**  
ZA3OP0022

System cable

**2000100801**  
ZAQUA077

System cable

**2000100852**  
ZAQUA078


System cable

**2000104274**  
ZAQUA012



**KWC** F5E - A3000 open  
electronic washbasin tap for rear panel mounting


**Modell-Linie: F5E | F5EV1016**  
Taps | Electronic taps



**System cable**


**2000104272**  
ZAQUA011

**Spare Parts**



**Solenoid valve**

**2000101328**  
ZAQUA032



**Piezo Switch**

**2000104441**  
EAT3O0001



**Electrical T junction**

**2000100853**  
ZAQUA075



**Stainless steel care set**

**2000109019**  
ZWSPL0024



**Cleaning product CHROMOL**

**2000105091**  
ZWSPL0023