


## KWC F5S-Mix self-closing shower mixer for in-wall installation

Modell-Linie: F5S | F5SM2013  
Showers | Self closing showers

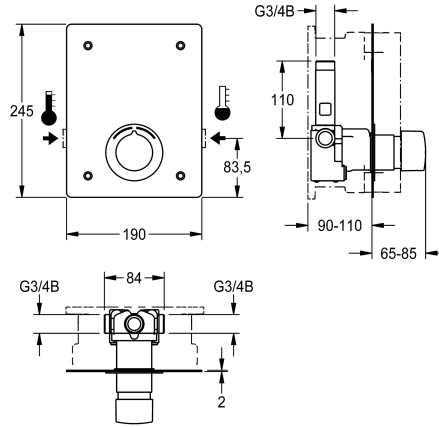

### KWC-No.

**2030072468**

F5S-Mix self-closing single mixer DN 15 as finished installation kit for in-wall installation in basic installation kit, for shower facilities. Especially suitable for facilities at risk of vandalism. FRAMIC self-closing mixer cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium separated design.

Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. For connection to hot and cold water. All-metal construction, visible parts polished chromium-plated. Stainless steel cover plate 190 x 245 x 2 mm. Mounting from the front with safety screws, chromium-plated rosette, backflow preventer and strainers. Depth adjustability 20 mm.

**NEW**

### Technical Data

|                                |                        |
|--------------------------------|------------------------|
| additional connections         | no                     |
| with backflow preventer        | yes                    |
| Built-in fitting model         | Finishing section      |
| calculation flow rate cold wat | 0.15 l/s               |
| calculation flow rate hot wate | 0.15 l/s               |
| circulation                    | no                     |
| compatible A3000 open          | no                     |
| connection with pay water disp | not possible           |
| Cover plate height             | 245 mm                 |
| Cover plate width              | 190 mm                 |
| with filter                    | yes                    |
| adjustable flow time           | yes                    |
| functional principle           | hydraulic self-closing |
| for hand shower                | no                     |
| hygiene flushing               | no                     |
| diameter nominal               | DN 15                  |
| inlet size                     | G 3/4 B                |
| Locking mechanism              | Top section, ceramic   |
| material casing                | stainless steel        |
| material fitting               | brass-look             |
| maximum flow time              | 35 Seconds             |
| minimum flow pressure          | 0.5 bar                |
| minimum flow time              | 5 Seconds              |
| type of mixing                 | yes                    |
| with rosettes/cover plate      | yes                    |

|                        |
|------------------------|
| no                     |
| yes                    |
| Finishing section      |
| 0.15 l/s               |
| 0.15 l/s               |
| no                     |
| no                     |
| not possible           |
| 245 mm                 |
| 190 mm                 |
| yes                    |
| yes                    |
| hydraulic self-closing |
| no                     |
| no                     |
| DN 15                  |
| G 3/4 B                |
| Top section, ceramic   |
| stainless steel        |
| brass-look             |
| 35 Seconds             |
| 0.5 bar                |
| 5 Seconds              |
| yes                    |
| yes                    |





## KWC F5S-Mix self-closing shower mixer for in-wall installation

**Modell-Linie: F5S | F5SM2013**  
Showers | Self closing showers

|                              |                                |
|------------------------------|--------------------------------|
| protective shutdown          | no                             |
| shower pipe draining         | no                             |
| sound insulation             | no                             |
| surface finish casing        | satin finished                 |
| surface finish fitting       | chromed                        |
| surface treatment fitting    | polished                       |
| temperature limit            | yes                            |
| thermal disinfection         | no                             |
| type of mounting             | in-wall installation with box  |
| type of operation            | manual operation               |
| type of shower               | in-wall fitting                |
| volume flow rate at 3 bar    | 0.2 l/s                        |
| water connection             | threaded connection (external) |
| position of water connection | from side                      |
| Accent colour                | chrome-look (glossy)           |
| Basic colour                 | stainless steel-look           |

### Mandatory Accessories




#### R5 System box for in-wall mixer

**2030028990**  
F5BX2001

#### R3 system box for in-wall mixers

**2030036141**  
F3BX2001

### Optional Accessories



#### Extension set for F5S

**2030044781**

## KWC F5S-Mix self-closing shower mixer for in-wall installation

Modell-Linie: F5S | F5SM2013  
Showers | Self closing showers

ACSM2001

---

### Spare Parts



**Plug chromed**

**2030053006**  
ASSX9004

---



**Handle push cap**

**2030050753**  
ASSM9004

---



**Guide ring**

**2030048356**  
ASSX9002

---



**Temperature stop**

**2030046189**  
ASSM9002


---



**Safety ring**

**2030048357**  
ASSX9003

---



**Rosette**

**2030045510**  
ASXM2003

---



**FRAMIC self-closing mixing cartridge**

**2030046185**  
ASSM9001

---



**Stainless steel care set**

**2000109019**  
ZWSP0024

---



**Cleaning product CHROMOL**

**2000105091**  
ZWSP0023

---