


KWC F5S-Mix
self-closing shower mixer for in-wall installation

Modell-Linie: F5S | F5SM2013
Showers | Self closing showers

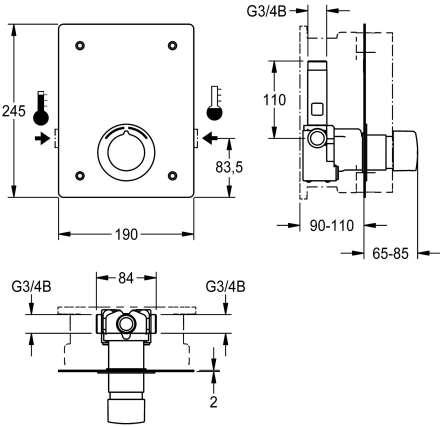

KWC-No.

2030072468

F5S-Mix self-closing single mixer DN 15 as finished installation kit for in-wall installation in basic installation kit, for shower facilities. Especially suitable for facilities at risk of vandalism. FRAMIC self-closing mixer cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium separated design.

Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. For connection to hot and cold water. All-metal construction, visible parts polished chromium-plated. Stainless steel cover plate 190 x 245 x 2 mm. Mounting from the front with safety screws, chromium-plated rosette, backflow preventer and strainers. Depth adjustability 20 mm.

Technical Data

additional connections	no
with backflow preventer	yes
Built-in fitting model	Finishing section
calculation flow rate cold wat	0.15 l/s
calculation flow rate hot water	0.15 l/s
circulation	no
compatible A3000 open	no
connection with pay water disp	not possible
Cover plate height	245 mm
Cover plate width	190 mm
with filter	yes
adjustable flow time	yes
functional principle	hydraulic self-closing
for hand shower	no
hygiene flushing	no
diameter nominal	DN 15
inlet size	G 3/4 B
Locking mechanism	Top section, ceramic
material casing	stainless steel
material fitting	brass-look
maximum flow time	35 Seconds
minimum flow pressure	0.5 bar
minimum flow time	5 Seconds
type of mixing	yes
with rosettes/cover plate	yes




FRAMIC
INSIDE

KWC F5S-Mix
self-closing shower mixer for in-wall installation

Modell-Linie: F5S | F5SM2013
Showers | Self closing showers

protective shutdown	no
shower pipe draining	no
sound insulation	no
surface finish casing	satin finished
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	yes
thermal disinfection	no
type of mounting	in-wall installation with box
type of operation	manual operation
type of shower	in-wall fitting
volume flow rate at 3 bar	0.2 l/s
water connection	threaded connection (external)
position of water connection	from side
Accent colour	chrome-look (glossy)
Basic colour	stainless steel-look

Mandatory Accessories



R5 System box for in-wall mixer


2030028990
F5BX2001



R3 system box for in-wall mixers

2030036141
F3BX2001

Optional Accessories



Extension set for F5S

2030044781



KWC F5S-Mix
self-closing shower mixer for in-wall installation

Modell-Linie: **F5S | F5SM2013**
Showers | Self closing showers

ACSM2001

Spare Parts



Plug chromed

2030053006
ASSX9004



Handle push cap

2030050753
ASSM9004



Guide ring

2030048356
ASSX9002




Temperature stop

2030046189
ASSM9002



Safety ring

2030048357
ASSX9003



Rosette

2030045510
ASXM2003



FRAMIC self-closing mixing cartridge

2030046185
ASSM9001



Stainless steel care set

2000109019
ZW SPL0024



Cleaning product CHROMOL

2000105091
ZW SPL0023