


KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT2104
Showers | Manual shower

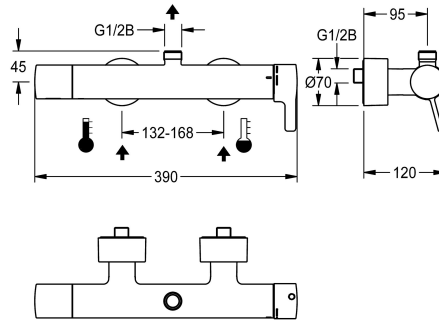

KWC-No.

3600003857

F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting, for shower facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing with outlet on top, G 3/4 B, for installation of outlet bend or wall-mounted shower pipe. All-metal


construction, polished chromium-plated brass. Volume-reduced, smooth water lines made of brass without nickel coating, decoupled from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

NEW

Technical Data

additional connections
circulation
connection with pay water disp
adjustable flow time
functional principle
for hand shower
diameter nominal
Locking mechanism
material casing
material fitting
type of mixing
overall depth
overall height
overall width
protective shutdown
shower pipe draining
sound insulation
surface finish casing
surface finish fitting
surface treatment fitting
temperature limit
with transformer/power supply

no
no
not possible
no
manual
no
DN 15
Top section, ceramic
brass-look
brass-look
with thermostat
140 mm
70 mm
340 mm
no
no
no
chromed
chromed
polished
yes
no



KWC F5L-Therm

Thermostatic single-lever wall-mounted mixer with pre-fitted hygiene unit

Modell-Linie: F5L | F5LT2104

Showers | Manual shower

type of mounting	wall mounting
type of operation	manual operation
type of shower	wall fitting
water connection	S-connections
position of water connection	from backside
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Bent outlet

2030050434
ACXX2005



Bent outlet

2030050435
ACXX2006



Shower pipe

2030041522
ACSX2002