


## KWC F5L-Therm

F5L-Therm thermostatic single-lever wall-mounted mixer with hand shower connection and pre-fitted hygiene unit

Modell-Linie: F5L | F5LT2112  
Showers | Manual shower

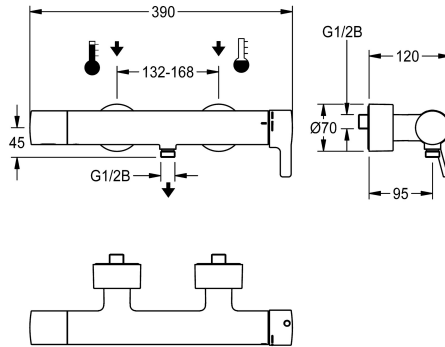

### KWC-No.

**3600003858**

F5L-Therm thermostatic single-lever mixer DN 15 as wall-mounted mixer for wall mounting, for shower facilities. Thermostatically controlled mixer cartridge with expansion element and active scald protection as well as adjustable and turn-proof temperature stop and ceramic disc technology. Pre-fitted hygiene unit with C-module including control electronics, 6 V lithium battery (CR-P2) and solenoid valve cartridge for automatic hygiene flushing and saving of statistical data. For connection to hot and cold water. Scald-protected, safe-touch housing with hand shower connection, G 1/2 B. All-metal construction, polished chromium-plated brass. Volume-


reduced, smooth water lines made of brass without nickel coating, decoupled from the tap housing. With thermal insulation components to reduce heat transfer from the tap housing to the cold-water line. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. Activated hygiene flushing, fixed interval of 24 hours. With option for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app.

**NEW**

### Technical Data

additional connections
circulation
connection with pay water disp
with filter
adjustable flow time
functional principle
for hand shower
diameter nominal
inlet size
Locking mechanism
material casing
material fitting
type of mixing
overall depth
overall height
overall width
protective shutdown
shower pipe draining
sound insulation
surface finish casing
surface finish fitting
surface treatment fitting

no
no
not possible
yes
no
manual
yes
DN 15
G 1/2 B
Top section, ceramic
brass
brass
with thermostat
140 mm
70 mm
340 mm
no
no
no
chromed
chromed
polished



## KWC F5L-Therm

F5L-Therm thermostatic single-lever wall-mounted mixer with hand shower connection and pre-fitted hygiene unit

Modell-Linie: **F5L | F5LT2112**

Showers | Manual shower

temperature limit	yes
with transformer/power supply	no
type of mounting	wall mounting
type of operation	manual operation
type of shower	wall fitting
water connection	S-connections
position of water connection	from backside
Accent colour	none
Basic colour	chrome-look (glossy)

### Optional Accessories



#### Hand shower

**2030051216**  
ACXX2007

#### Shower bracket

**2030051217**  
ACXX2008